



OUTDOOR STREET LIGHTING SOLUTION

8+ years street Lighting manufacturer

solar street light . LED street light
floodlight . Garden light . lawn light

GUANGDONG LIFAN LIGHTING CO., LTD



About Us

Lifan lighting is a national High-Tech enterprise in the lighting industry. Lifan Lighting focus on solar street light, LED street light & light pole for 8 years.

Lifan Lighting has established a laboratory with fully-equipped testing equipment. Such as IES photometric distribution test system, Life testing system of LED, EMC testing system, Integrating sphere, Lightning surge generator, LED power driver tester, Drop and vibration test stand.

These testing equipment can not only ensure the quality of products, but also provide the most accurate technical parameters for your engineering projects.

Lifan Lighting products have obtained ISO9001/CE/CB/FCC/SAA/RoHs/CCC/LM-80/EN 62471/IP 66 and other series certifications.

Lifan Lighting has provided OEM&ODM and also provided customized engineering needs for customers from many countries, and won many good reviews.

Lifan lighting products have been sold to over

80+ countries

All Around the World.

Become Respected outdoor lights Company Successfully



About Lifan Lighting Business Data

Active Agent

20+

Years Experience

8+

factory area

16,000m²

Government
Project

120+

Patent
Certificate

13


production line

6

CERTIFICATIONS

Quality & Certifications

We have passed a number of authoritative certifications to ensure product quality meets global export standards: ISO9001 / CE / RoHS / EMC / IES / CB / LVD / MSDS / IP65...

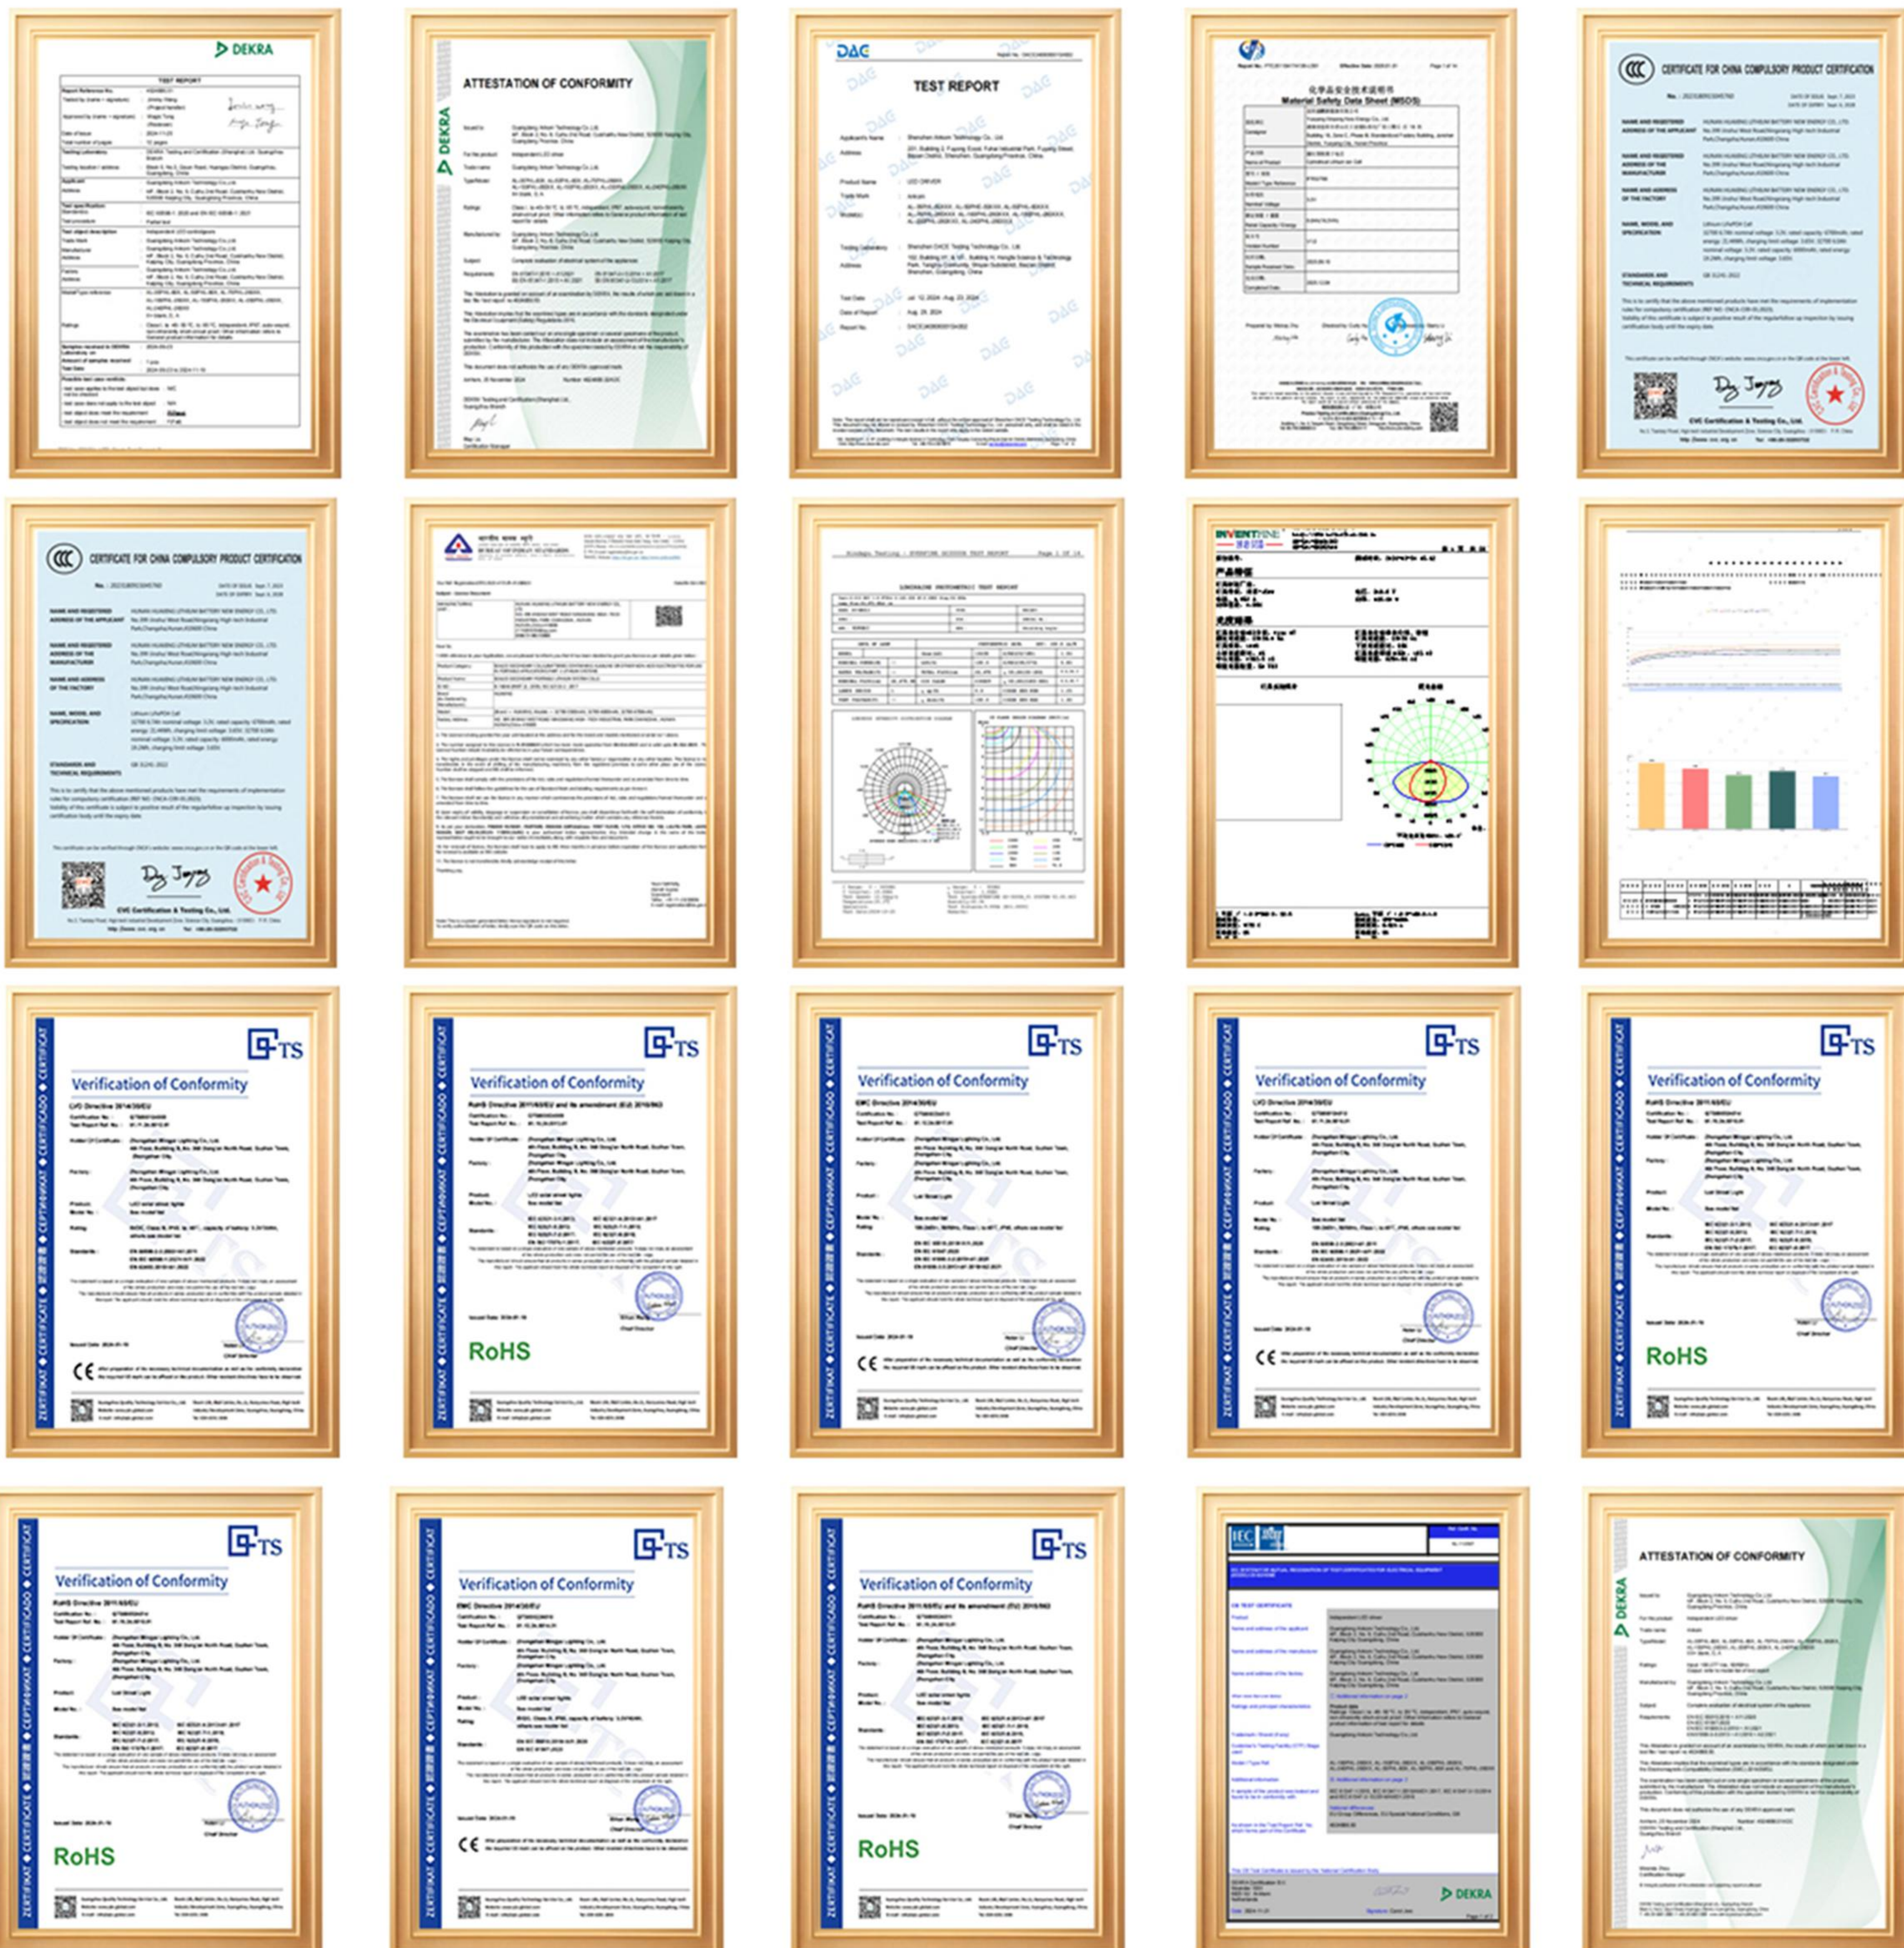

LIFAN. Test Room

Comprehensive product testing instruments



Solar Panel Real Power Test




waterproof test



High Temperature Test




Integrating Sphere Test

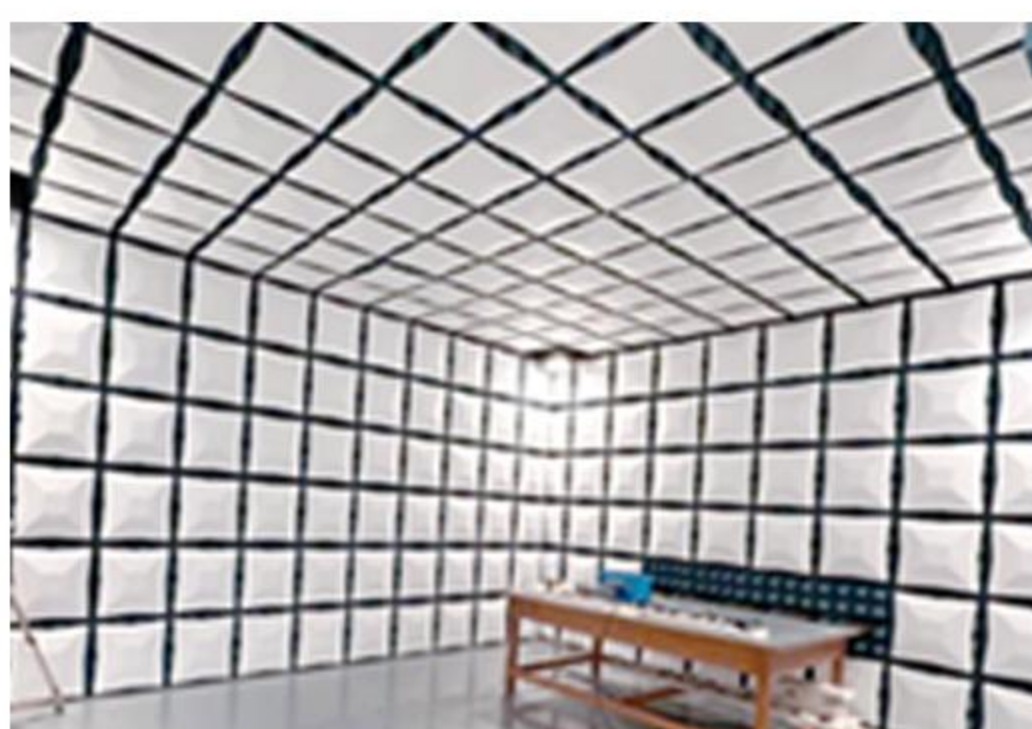

EMF test



IES test

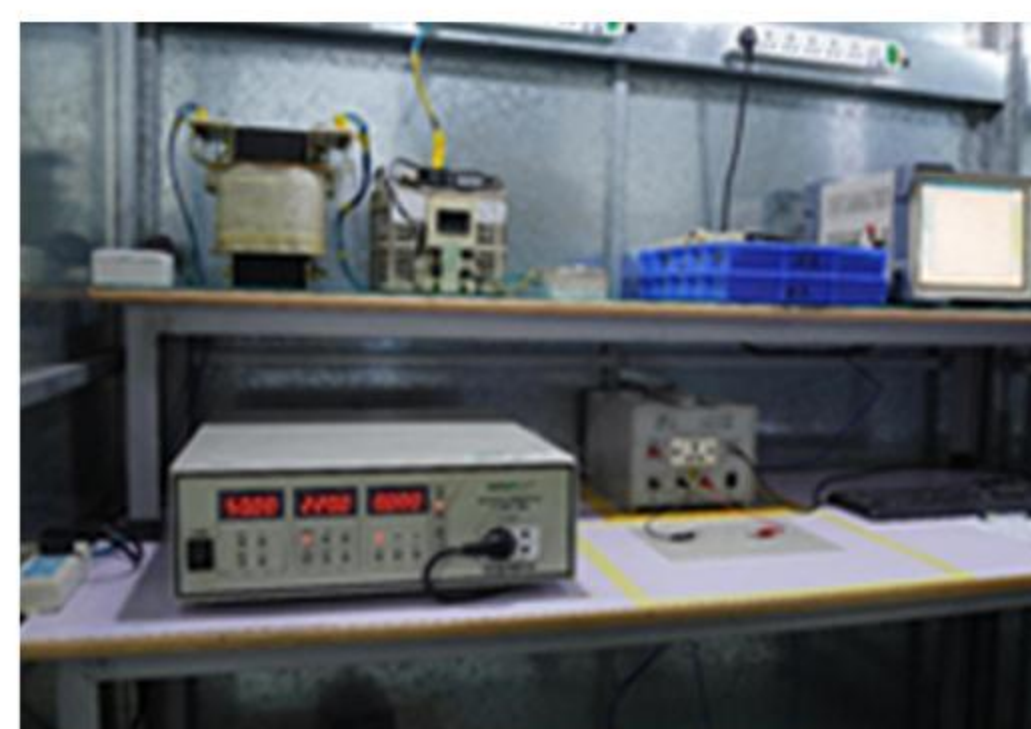


EMC test




Lighting Ageing Test




Battery test

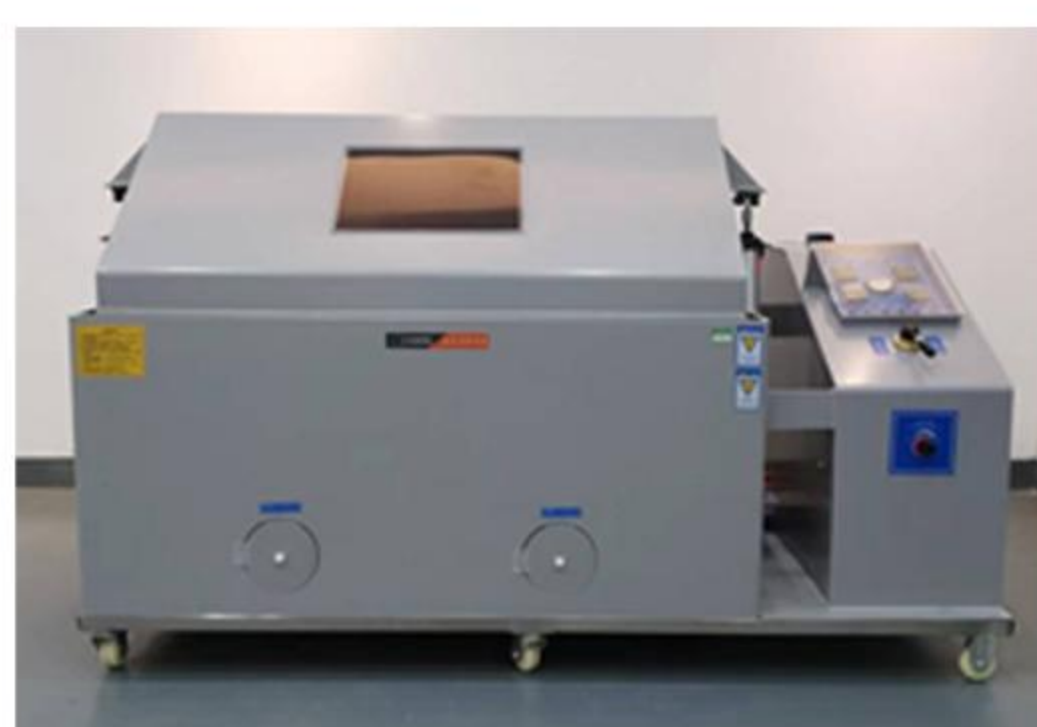

salt spray test

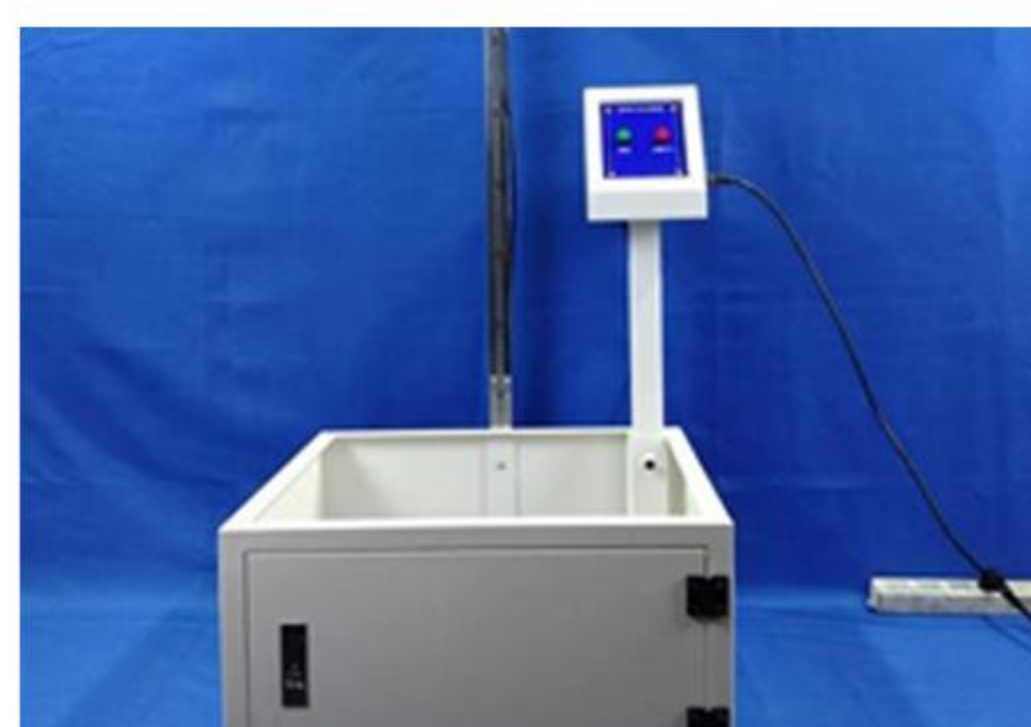

impact test


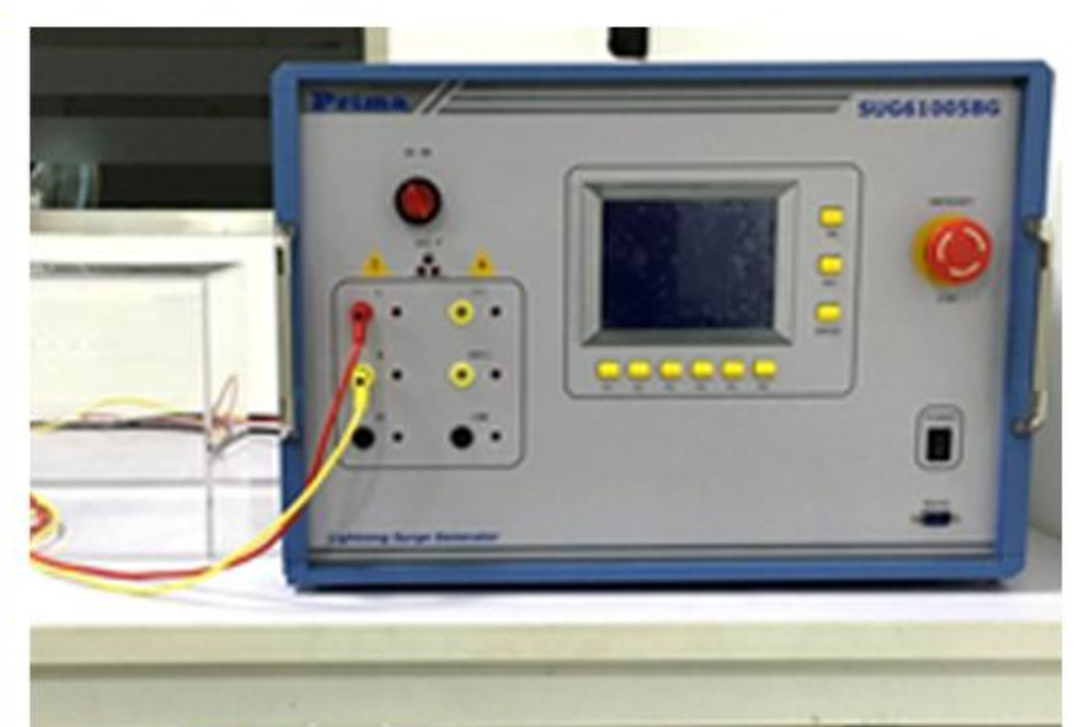


Lighting Surge Test

Assembly Workshop



Photovoltaic panel workshop

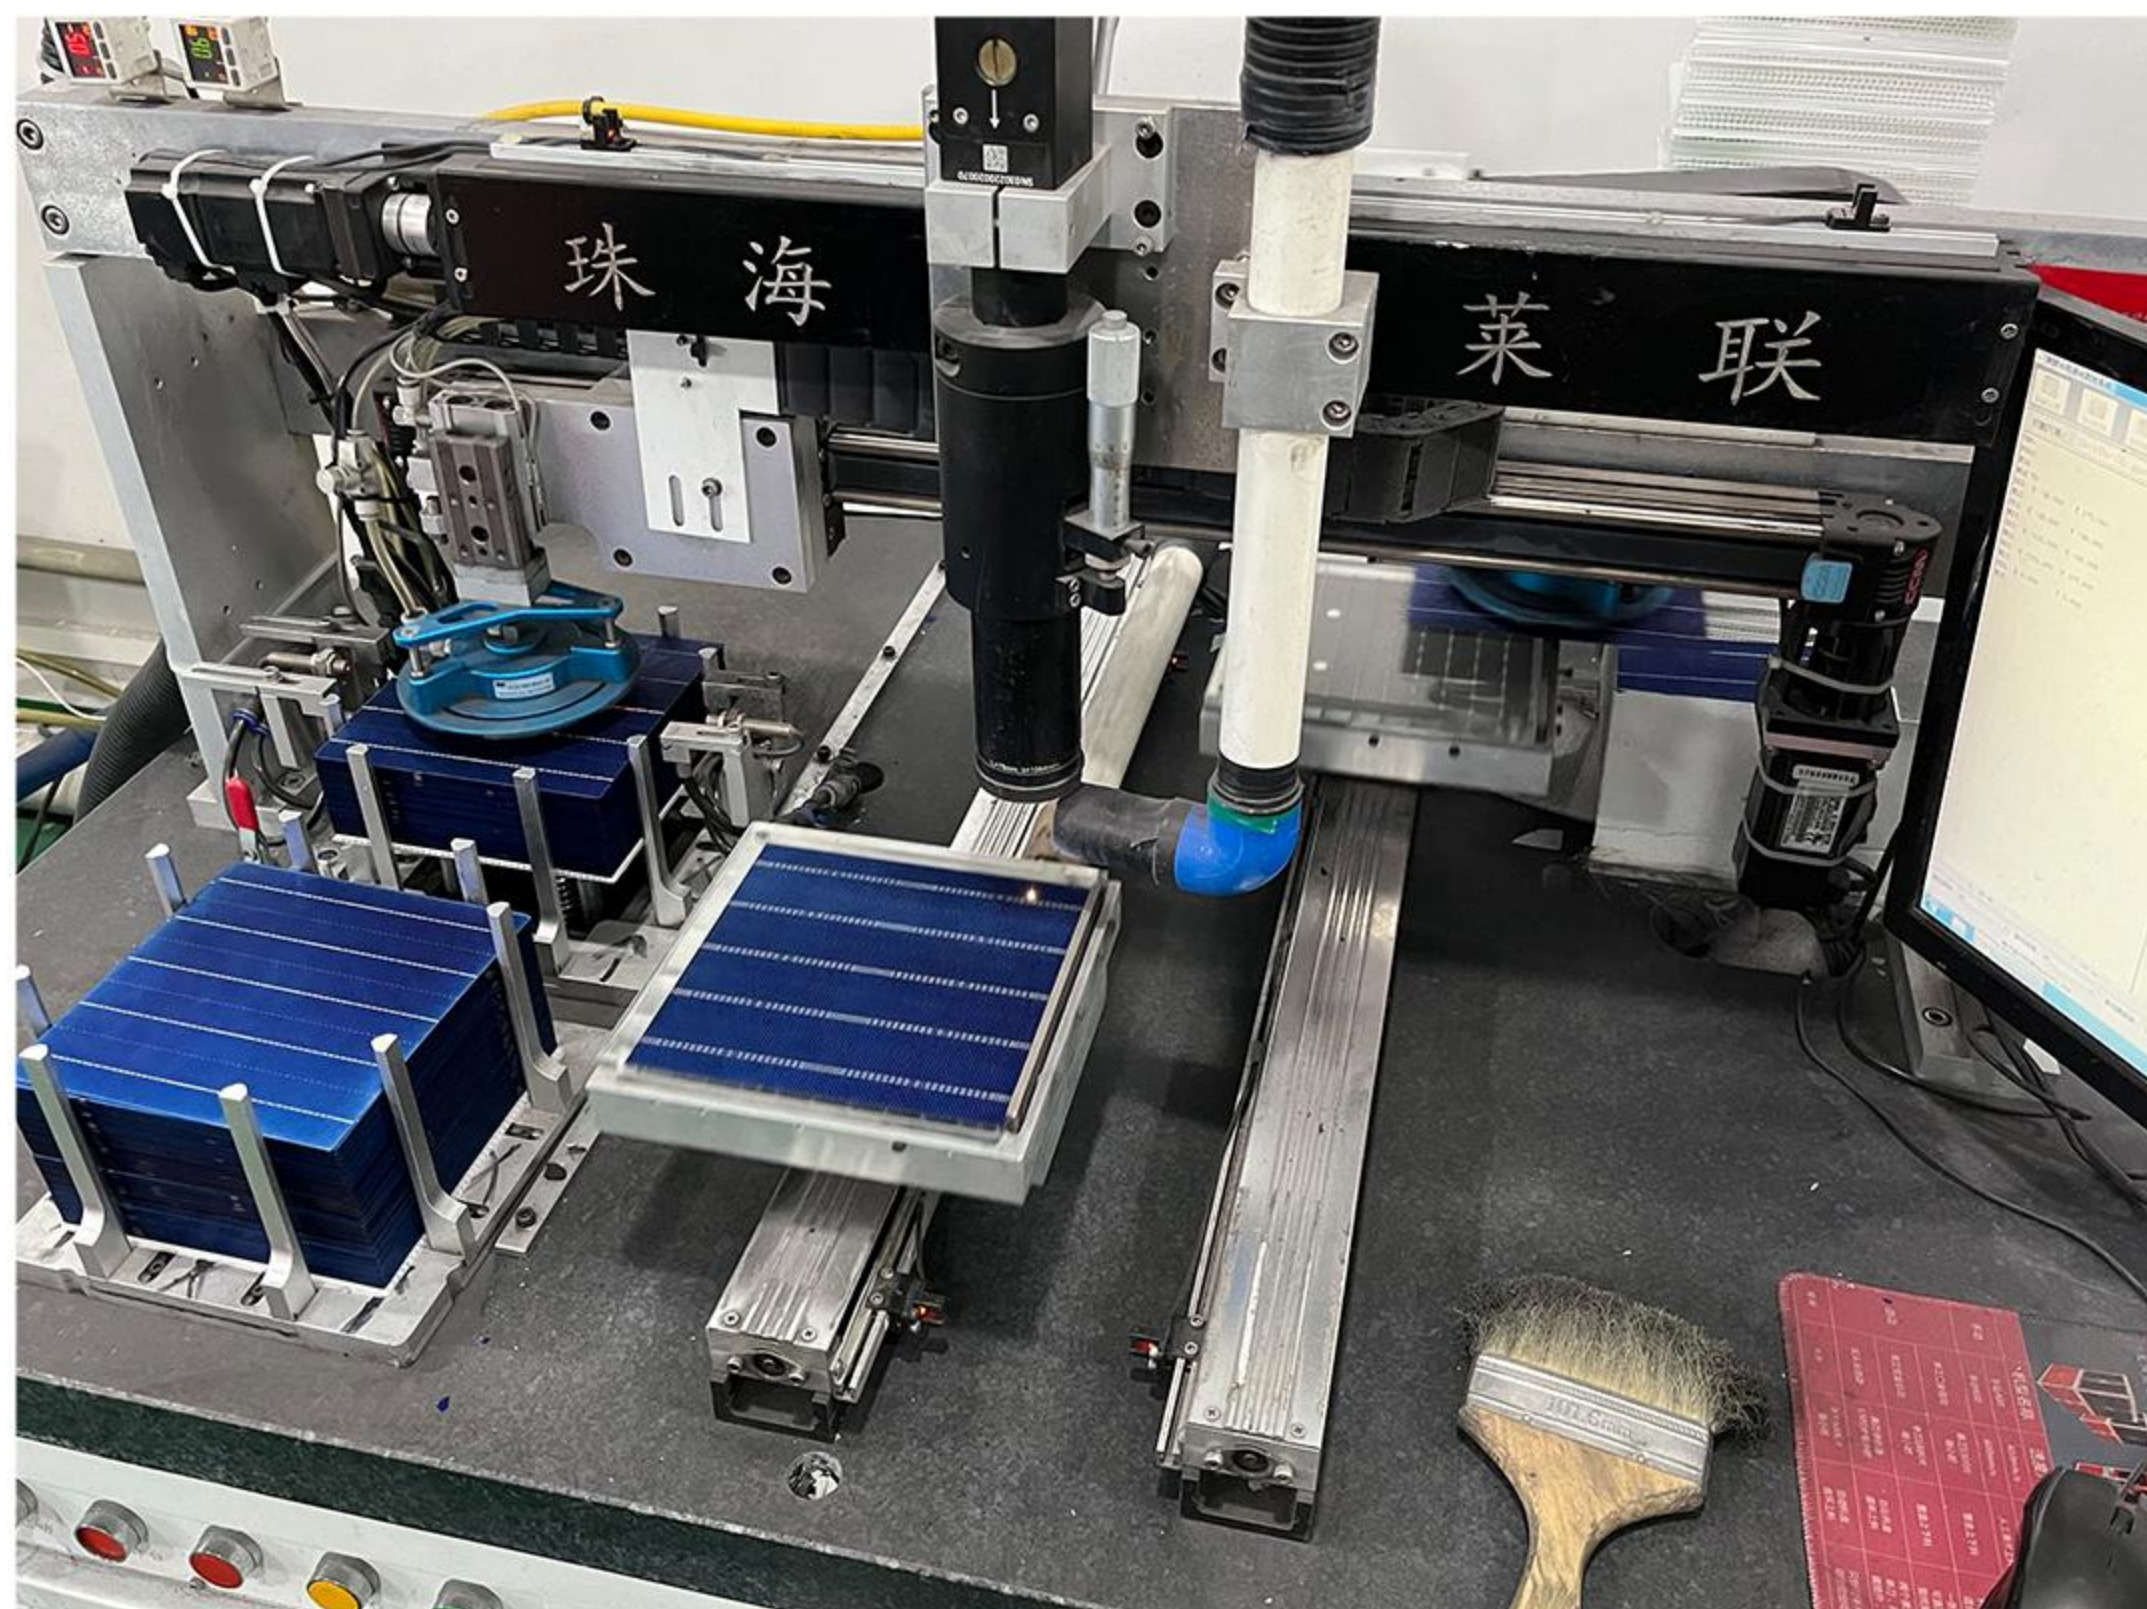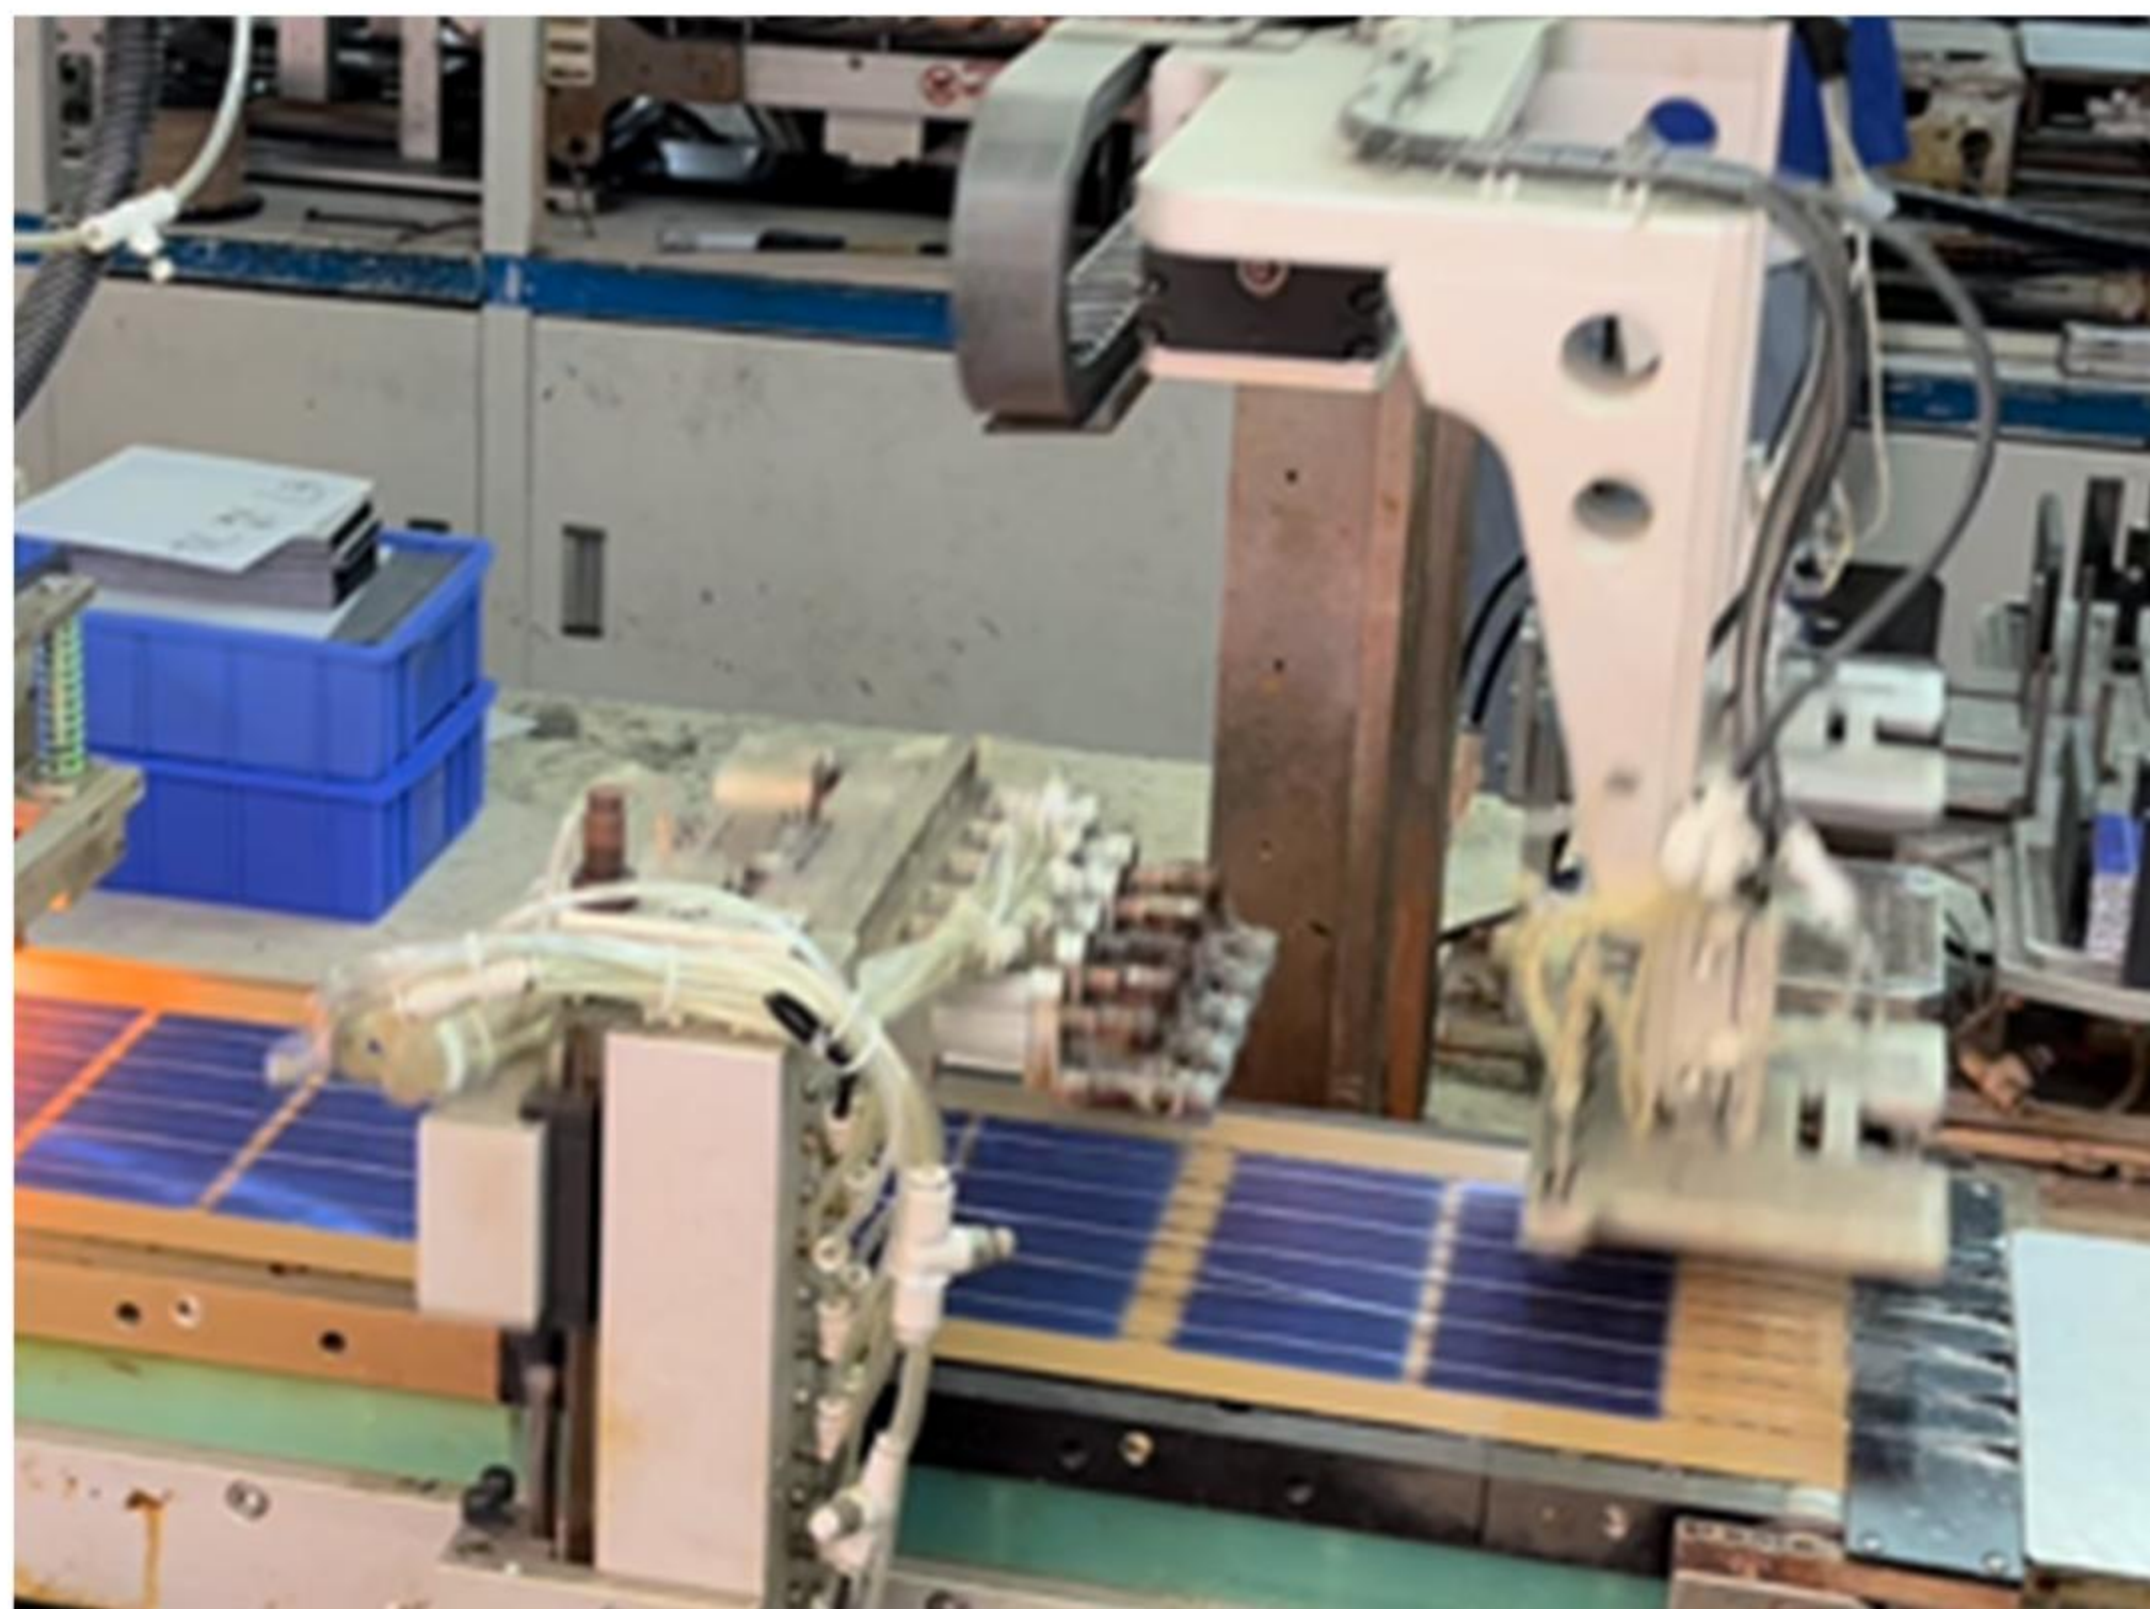

Streetlight Pole Workshop





SOLAR STREET LIGHT SERIES



Product Description

1. Integrated design and source, high capacity LiFePO4 lithium battery,high energy,and long life, light weights, green and environmentalprotection, do not produce any harmful substances.
2. Philips LED chip with high light efficiency which can reach 180LM/W, and whole lamp light efficiency can reach 160LM/W at least
- 3.All series use high efficiency controller which can increase 15%-30% charge efficiency
- 4.Design with high efficiency solar cell (>23%)
- 5.Convenient installation and maintenance, no need of cableinstallation or special light pole, functional components modular design, installation and maintenance, convenient and quick replacement

Model	LF-YT01-100w	LF-YT01-150w	LF-YT01-200w	LF-YT01-250w
Solar Panel(MONO)	40W	60W	80W	100W
High Capacity Lithium Battery	30AH	40AH	60AH	80AH
Luminous Flux (All light Pattern)	160LM/W	160LM/W	160LM/W	160LM/W
Recommend Installation Height	4-5m	5-7m	6-8m	7-9m
Solar Panel Charge Time	4-6 hours	4-6 hours	4-6 hours	4-6 hours
Rainy Days Support	5-7 rainy days	5-7 rainy days	5-7 rainy days	5-7 rainy days
Working Time (Per day)	≥12 hours	≥12 hours	≥12 hours	≥12 hours
Color Temperature	6500K	6500K	6500K	6500K
Light Pole Diameter	φ60mm	φ60mm	φ76mm	φ76mm
Storage Temperature	-15°C~55°C	-15°C~55°C	-15°C~55°C	-15°C~55°C
chip	5054SMD/100PCS	5054SMD/150PCS	5054SMD/200PCS	5054SMD/250PCS
Waterproof Level	IP65	IP65	IP65	IP65
Product Dimensions	700*350*150mm	887*400*280mm	1160*400*280mm	1435*400*280mm



SOLAR STREET LIGHT SERIES



Product Description

1. Integrated design and source, high capacity LiFePO4 lithium battery, high energy, and long life, light weights, green and environmental protection, do not produce any harmful substances.
2. Philips LED chip with high light efficiency which can reach 180LM/W, and whole lamp light efficiency can reach 160LM/W at least
3. All series use high efficiency controller which can increase 15%-30% charge efficiency
4. Design with high efficiency solar cell (>23%)
5. Convenient installation and maintenance, no need of cable installation or special light pole, functional components modular design, installation and maintenance, convenient and quick replacement

Model	LF-YT02-150w	LF-YT02-200w	LF-YT02-250w
Solar Panel(MONO)	40W	45W	55W
High Capacity Lithium Battery	30AH	35AH	40AH
Luminous Flux (All light Pattern)	160LM/W	160LM/W	160LM/W
Recommend Installation Height	4-5m	5-6m	6-7m
Solar Panel Charge Time	4-6 hours	4-6 hours	4-6 hours
Rainy Days Support	5-7 rainy days	5-7 rainy days	5-7 rainy days
Working Time (Per day)	≥12 hours	≥12 hours	≥12 hours
Color Temperature	6500K	6500K	6500K
Light Pole Diameter	φ60mm	φ60mm	φ60mm
Storage Temperature	-15°C~55°C	-15°C~55°C	-15°C~55°C
chip	5054SMD/306PCS	5054SMD/408PCS	5054SMD/510PCS
Waterproof Level	IP65	IP65	IP65
Product Dimensions	703*365*87mm	810*365*87mm	916*365*87mm



SOLAR STREET LIGHT SERIES



Product Description

1. Integrated design and source, high capacity LiFePO4 lithium battery, high energy, and long life, light weights, green and environmental protection, do not produce any harmful substances.
2. Adopting the high luminous efficiency 5054 new product, it can reach 180LM/W, and the full light efficiency can reach at least 160LM/W
3. All series use high efficiency controller which can increase 15%-30% charge efficiency
4. Design with high efficiency solar cell (>23%)
5. Convenient installation and maintenance, no need of cable installation or special light pole, functional components modular design, installation and maintenance, convenient and quick replacement

Model	MY-YT03A-100w	MY-YT03A-150w	MY-YT03A-200w	MY-YT03A-250w
Solar Panel(MONO)	60W	80W	100W	120W
High Capacity Lithium Battery	50AH	60AH	90AH	100AH
Luminous Flux (All light Pattern)	160LM/W	160LM/W	160LM/W	160LM/W
Recommend Installation Height	4-5m	5-7m	6-8m	7-9m
Solar Panel Charge Time	4-6 hours	4-6 hours	4-6 hours	4-6 hours
Rainy Days Support	5-7 rainy days	5-7 rainy days	5-7 rainy days	5-7 rainy days
Working Time (Per day)	≥12 hours	≥12 hours	≥12 hours	≥12 hours
Color Temperature	6500K	6500K	6500K	6500K
Light Pole Diameter	φ60/76mm	φ60/76mm	φ60/76mm	φ60/76mm
Storage Temperature	-15°C~55°C	-15°C~55°C	-15°C~55°C	-15°C~55°C
chip	5054SMD/120PCS	5054SMD/180PCS	5054SMD/240PCS	5054SMD/300PCS
Waterproof Level	IP65	IP65	IP65	IP65
Product Dimensions	840*400*195mm	1110*400*195mm	1310*400*195mm	1598*400*195mm



SOLAR STREET LIGHT SERIES



Product Description

1. Integrated design and source, high capacity LiFePO4 lithium battery, high energy, and long life, light weights, green and environmental protection, do not produce any harmful substances.
2. Adopting the high luminous efficiency 5054 new product, it can reach 180LM/W, and the full light efficiency can reach at least 160LM/W
3. All series use high efficiency controller which can increase 15%-30% charge efficiency
4. Design with high efficiency solar cell (>23%)
5. Convenient installation and maintenance, no need of cable installation or special light pole, functional components modular design, installation and maintenance, convenient and quick replacement

Model	LF-YT03B-100w	LF-YT03B-150w	LF-YT03B-200w	LF-YT03B-250w
Solar Panel(MONO)	60W	80W	100W	120W
High Capacity Lithium Battery	50AH	60AH	90AH	100AH
Luminous Flux (All light Pattern)	160LM/W	160LM/W	160LM/W	160LM/W
Recommend Installation Height	4-5m	5-7m	6-8m	7-9m
Solar Panel Charge Time	4-6 hours	4-6 hours	4-6 hours	4-6 hours
Rainy Days Support	5-7 rainy days	5-7 rainy days	5-7 rainy days	5-7 rainy days
Working Time (Per day)	≥12 hours	≥12 hours	≥12 hours	≥12 hours
Color Temperature	6500K	6500K	6500K	6500K
Light Pole Diameter	φ60/76mm	φ60/76mm	φ60/76mm	φ60/76mm
Storage Temperature	-15°C~55°C	-15°C~55°C	-15°C~55°C	-15°C~55°C
chip	5054SMD/120PCS	5054SMD/160PCS	5054SMD/240PCS	5054SMD/320PCS
Waterproof Level	IP65	IP65	IP65	IP65
Product Dimensions	840*400*195mm	1110*400*195mm	1310*400*195mm	1598*400*195mm



SOLAR STREET LIGHT SERIES



Product Description

- 1. Integrated design and source, high capacity LiFePO4 lithium battery, high energy, and long life, light weights, green and environmental protection, do not produce any harmful substances.
- 2. Philips LED chip with high light efficiency which can reach 180LM/W, and whole lamp light efficiency can reach 160LM/W at least
- 3. All series use high efficiency controller which can increase 15%-30% charge efficiency
- 4. Design with high efficiency solar cell (>23%)
- 5. Convenient installation and maintenance, no need of cable installation or special light pole, functional components modular design, installation and maintenance, convenient and quick replacement

Model	LF-YT04-150w	LF-YT04-200w	LF-YT04-300w
Solar Panel(MONO)	70W	90W	120W
High Capacity Lithium Battery	60AH	90AH	100AH
Luminous Flux (All light Pattern)	160LM/W	160LM/W	160LM/W
Recommend Installation Height	5-7m	6-8m	7-9m
Solar Panel Charge Time	4-6 hours	4-6 hours	4-6 hours
Rainy Days Support	5-7 rainy days	5-7 rainy days	5-7 rainy days
Working Time (Per day)	≥12 hours	≥12 hours	≥12 hours
Color Temperature	6500K	6500K	6500K
Light Pole Diameter	φ60mm	φ60mm	φ76mm
Storage Temperature	-15°C~55°C	-15°C~55°C	-15°C~55°C
chip	5054SMD/150PCS	5054SMD/200PCS	5054SMD/300PCS
Waterproof Level	IP65	IP65	IP65
Product Dimensions	910*400*280mm	1168*400*280mm	1528*400*280mm



SOLAR STREET LIGHT SERIES



Product Description

1. Integrated design and source, high capacity LiFePO4 lithium battery,high energy,and long life, light weights, green and environmentalprotection, do not produce any harmful substances.
2. Philips LED chip with high light efficiency which can reach 220LM/W, and whole lamp light efficiency can reach 200LM/W at least
- 3.All series use high efficiency controller which can increase 15%-30% charge efficiency
- 4.Design with high efficiency solar cell (>23%)
- 5.Convenient installation and maintenance, no need of cableinstallation or special light pole, functional components modular design, installation and maintenance, convenient and quick replacement

Model	LF-YT05-200w	LF-YT05-250w	LF-YT05-300w
Solar Panel(MONO)	100W	120W	150W
High Capacity Lithium Battery	384WH	615WH	768AH
Luminous Flux (All light Pattern)	200LM/W	200LM/W	200LM/W
Recommend Installation Height	6-8m	8-10m	10-12m
Solar Panel Charge Time	4-6 hours	4-6 hours	4-6 hours
Rainy Days Support	5-7 rainy days	5-7 rainy days	5-7 rainy days
Working Time (Per day)	≥12 hours	≥12 hours	≥12 hours
Color Temperature	6500K	6500K	6500K
Light Pole Diameter	φ76mm	φ76mm	φ76mm
Storage Temperature	-15℃~55℃	-15℃~55℃	-15℃~55℃
chip	7070SMD/88PCS	7070SMD/110PCS	7070SMD/132PCS
Waterproof Level	IP65	IP65	IP65
Product Dimensions	1310*438*185mm	1550*438*185mm	1900*438*185mm



SOLAR STREET LIGHT SERIES



Product Description

- 1. Integrated design and source, high capacity LiFePO4 lithium battery,high energy,and long life, light weights, green and environmentalprotection, do not produce any harmful substances.
- 2. Philips LED chip with high light efficiency which can reach 180LM/W, and whole lamp light efficiency can reach 160LM/W at least
- 3.All series use high efficiency controller which can increase 15%-30% charge efficiency
- 4.Design with high efficiency solar cell (>23%)
- 5.Convenient installation and maintenance, no need of cableinstallation or special light pole, functional components modular design, installation and maintenance, convenient and quick replacement

Model	LF-YT06-200w	LF-YT06-250w	LF-YT06-300w
Solar Panel(MONO)	80W	100W	120W
High Capacity Lithium Battery	60AH	80AH	100AH
Luminous Flux (All light Pattern)	160LM/W	160LM/W	160LM/W
Recommend Installation Height	6-8m	7-9m	8-10m
Solar Panel Charge Time	4-6 hours	4-6 hours	4-6 hours
Rainy Days Support	5-7 rainy days	5-7 rainy days	5-7 rainy days
Working Time (Per day)	≥12 hours	≥12 hours	≥12 hours
Color Temperature	6500K	6500K	6500K
Light Pole Diameter	φ76mm	φ76mm	φ76mm
Storage Temperature	-15℃~55℃	-15℃~55℃	-15℃~55℃
chip	5054SMD	5054SMD	5054SMD
Waterproof Level	IP65	IP65	IP65
Product Dimensions	1201*445mm	1525*445mm	1705*445mm



SOLAR STREET LIGHT SERIES




Product Description

1. Integrated design and source, high capacity LiFePO4 lithium battery, high energy, and long life, light weights, green and environmental protection, do not produce any harmful substances.
2. Philips LED chip with high light efficiency which can reach 180LM/W, and whole lamp light efficiency can reach 160LM/W at least
3. All series use high efficiency controller which can increase 15%-30% charge efficiency
4. Design with high efficiency solar cell (>23%)
5. Convenient installation and maintenance, no need of cable installation or special light pole, functional components modular design, installation and maintenance, convenient and quick replacement

Model	LF-YT07-50w	LF-YT07-100w	LF-YT07-150w
Solar Panel(MONO)	50W	75W	95W
High Capacity Lithium Battery	40AH	55AH	80AH
Luminous Flux (All light Pattern)	160LM/W	160LM/W	160LM/W
Recommend Installation Height	5-6m	6-7m	7-8m
Solar Panel Charge Time	4-6 hours	4-6 hours	4-6 hours
Rainy Days Support	5-7 rainy days	5-7 rainy days	5-7 rainy days
Working Time (Per day)	≥12 hours	≥12 hours	≥12 hours
Color Temperature	6500K	6500K	6500K
Light Pole Diameter	φ60/76mm	φ60/76mm	φ60/76mm
Storage Temperature	-15°C~55°C	-15°C~55°C	-15°C~55°C
chip	5054SMD	5054SMD	5054SMD
Waterproof Level	IP65	IP65	IP65
Product Dimensions	800*340*78mm	910*400*87mm	1170*400*87mm



SOLAR STREET LIGHT SERIES

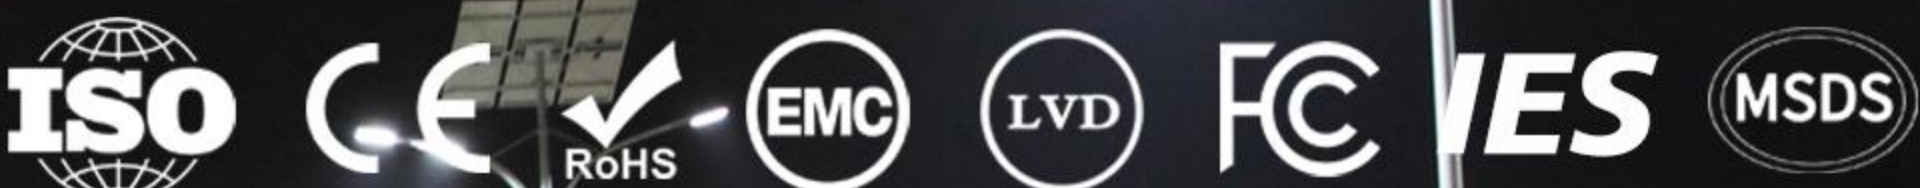

Product Description

- 1. Integrated design and source, high capacity LiFePO4 lithium battery,high energy,and long life, light weights, green and environmentalprotection, do not produce any harmful substances.
- 2. Adopting the high luminous efficiency 7070 new product, it can reach 200LM/W, and the full light efficiency can reach at least 190LM/W
- 3.All series use high efficiency controller which can increase 15%-30% charge efficiency
- 4.Design with high efficiency solar cell (>23%)
- 5.Convenient installation and maintenance, no need of cableinstallation or special light pole, functional components modular design, installation and maintenance, convenient and quick replacement

Model	LF-FT01-50w	LF-FT01-80w	LF-FT01-100w
Solar Panel(MONO)	100W	120W	150W
High Capacity Lithium Battery	448WH	768WH	896WH
Luminous Flux (All light Pattern)	190LM/W	190LM/W	190LM/W
Recommend Installation Height	5-6m	7-8m	8-9m
Solar Panel Charge Time	4-6 hours	4-6 hours	4-6 hours
Rainy Days Support	5-7 rainy days	5-7 rainy days	5-7 rainy days
Working Time (Per day)	≥12 hours	≥12 hours	≥12 hours
Color Temperature	6500K	6500K	6500K
Light Pole Diameter	φ60mm	φ60mm	φ60mm
Storage Temperature	-15°C~55°C	-15°C~55°C	-15°C~55°C
chip	7070SMD	7070SMD	7070SMD
Waterproof Level	IP65	IP65	IP65
Product Dimensions	600*230*93mm	650*230*93mm	650*230*93mm



SOLAR STREET LIGHT SERIES



Product Description

1. Integrated design and source, high capacity LiFePO4 lithium battery,high energy,and long life, light weights, green and environmentalprotection, do not produce any harmful substances.
2. Adopting the high luminous efficiency 7070 new product, it can reach 200LM/W, and the full light efficiency can reach at least 190LM/W
- 3.All series use high efficiency controller which can increase 15%-30% charge efficiency
- 4.Design with high efficiency solar cell (>23%)
- 5.Convenient installation and maintenance, no need of cableinstallation or special light pole, functional components modular design, installation and maintenance, convenient and quick replacement

Model	LF-FT02-50w	LF-FT02-80w	LF-FT03-100w
Solar Panel(MONO)	100W	120W	150W
High Capacity Lithium Battery	448WH	640WH	768WH
Luminous Flux (All light Pattern)	190LM/W	190LM/W	190LM/W
Recommend Installation Height	5-6m	7-8m	8-9m
Solar Panel Charge Time	4-6 hours	4-6 hours	4-6 hours
Rainy Days Support	5-7 rainy days	5-7 rainy days	5-7 rainy days
Working Time (Per day)	≥12 hours	≥12 hours	≥12 hours
Color Temperature	6500K	6500K	6500K
Light Pole Diameter	φ60mm	φ60mm	φ60mm
Storage Temperature	-15℃~55℃	-15℃~55℃	-15℃~55℃
chip	7070SMD	7070SMD	7070SMD
Waterproof Level	IP65	IP65	IP65
Product Dimensions	430*300*90mm	515*300*90mm	600*300*90mm



SOLAR STREET LIGHT SERIES



Product Description

1. Integrated design and source, high capacity LiFePO4 lithium battery, high energy, and long life, light weights, green and environmental protection, do not produce any harmful substances.
2. Best selling items with high brightness and good market acceptance, which can bring better sales to stores and wholesalers
3. All series use high efficiency controller which can increase 15%-30% charge efficiency
4. Design with high efficiency solar cell (>23%)
5. Convenient installation and maintenance, no need of cable installation or special light pole, functional components modular design, installation and maintenance, convenient and quick replacement



Model	LF-AYT01-600W	MY-AYT01-800w	MY-AYT01-1000w	MY-AYT01-1200w
Solar Panel(MONO)	18W	25W	30W	35
High Capacity Lithium Battery	15AH	20AH	25AH	30AH
Shell material	ABS	ABS	ABS	ABS
Recommend Installation Height	4m	5m	6m	6m
Solar Panel Charge Time	4-6 hours	4-6 hours	4-6 hours	4-6 hours
Rainy Days Support	3 rainy days	3 rainy days	3 rainy days	3 rainy days
Working Time (Per day)	≥12 hours	≥12 hours	≥12 hours	≥12 hours
Color Temperature	6500K	6500K	6500K	6500K
Light Pole Diameter	φ50mm	φ50mm	φ50mm	φ50mm
Illuminated area	120-150m²	150-180m²	200-230m²	230-260m²
chip	5730SMD/480PCS	5730SMD/640PCS	5730SMD/800PCS	5730SMD/960PCS
Waterproof Level	IP65	IP65	IP65	IP65
Product Dimensions	440*70*342mm	597*70*342mm	677*70*342mm	760*80*350mm



SOLAR STREET LIGHT SERIES



Product Description

1. Integrated design and source, high capacity LiFePO4 lithium battery, high energy, and long life, light weights, green and environmental protection, do not produce any harmful substances.
2. Best selling items with high brightness and good market acceptance, which can bring better sales to stores and wholesalers
3. All series use high efficiency controller which can increase 15%-30% charge efficiency
4. Design with high efficiency solar cell (>23%)
5. Convenient installation and maintenance, no need of cable installation or special light pole, functional components modular design, installation and maintenance, convenient and quick replacement

Model	LF-AYT02-600W	LF-AYT02-900W	LF-AYT02-1200W
Solar Panel(MONO)	18W	25W	30W
High Capacity Lithium Battery	15AH	20AH	25AH
Shell material	ABS	ABS	ABS
Recommend Installation Height	4m	5m	6m
Solar Panel Charge Time	4-6 hours	4-6 hours	4-6 hours
Rainy Days Support	3 rainy days	3 rainy days	3 rainy days
Working Time (Per day)	≥12 hours	≥12 hours	≥12 hours
Color Temperature	6500K	6500K	6500K
Light Pole Diameter	φ50mm	φ50mm	φ50mm
Illuminated area	150-180m²	200-230m²	230-260m²
chip	5730SMD/576PCS	5730SMD/864PCS	5730SMD/1152PCS
Waterproof Level	IP65	IP65	IP65
Product Dimensions	350*80*450mm	350*80*600mm	350*80*680mm



SOLAR STREET LIGHT SERIES



Product Description

1. Integrated design and source, high capacity LiFePO4 lithium battery,high energy,and long life, light weights, green and environmentalprotection, do not produce any harmful substances.
2. Best selling items with high brightness and good market acceptance, which can bring better sales to stores and wholesalers
- 3.All series use high efficiency controller which can increase 15%-30% charge efficiency
- 4.Design with high efficiency solar cell (>23%)
- 5.Convenient installation and maintenance, no need of cableinstallation or special light pole, functional components modular design, installation and maintenance, convenient and quick replacement

Model	LF-AYT03-500W	LF-AYT03-1000W	LF-AYT03-1500W
Solar Panel(MONO)	15W	25W	30W
High Capacity Lithium Battery	15AH	25AH	30AH
Shell material	ABS	ABS	ABS
Recommend Installation Height	4m	5m	6m
Solar Panel Charge Time	4-6 hours	4-6 hours	4-6 hours
Rainy Days Support	3 rainy days	3 rainy days	3 rainy days
Working Time (Per day)	≥12 hours	≥12 hours	≥12 hours
Color Temperature	6500K	6500K	6500K
Light Pole Diameter	φ50mm	φ50mm	φ50mm
Illuminated area	150-180m²	200-230m²	230-260m²
chip	5730SMD/560PCS	5730SMD/1120PCS	5730SMD/1680PCS
Waterproof Level	IP65	IP65	IP65
Product Dimensions	449*340*70mm	685*340*70mm	920*340*70mm



SOLAR STREET LIGHT SERIES



Product Description

1. Integrated design and source, high capacity LiFePO4 lithium battery,high energy,and long life, light weights, green and environmentalprotection, do not produce any harmful substances.
2. Best selling items with high brightness and good market acceptance, which can bring better sales to stores and wholesalers
- 3.All series use high efficiency controller which can increase 15%-30% charge efficiency
- 4.Design with high efficiency solar cell (>23%)
- 5.Convenient installation and maintenance, no need of cableinstallation or special light pole, functional components modular design, installation and maintenance, convenient and quick replacement



Model	LF-AYT04-300W	LF-AYT04-600W	LF-AYT04-900W
Solar Panel(MONO)	12W	20W	30W
High Capacity Lithium Battery	10AH	18AH	20AH
Shell material	ABS	ABS	ABS
Recommend Installation Height	4m	5m	6m
Solar Panel Charge Time	4-6 hours	4-6 hours	4-6 hours
Rainy Days Support	3 rainy days	3 rainy days	3 rainy days
Working Time (Per day)	≥12 hours	≥12 hours	≥12 hours
Color Temperature	6500K	6500K	6500K
Light Pole Diameter	φ50mm	φ50mm	φ50mm
Illuminated area	150-180m²	200-230m²	230-260m²
chip	5730SMD/162*3PCS	5730SMD/324*3PCS	5730SMD/496*3PCS
Waterproof Level	IP65	IP65	IP65
Product Dimensions	397*342*71mm	564*342*71mm	740*342*71mm



SOLAR STREET LIGHT SERIES



Product Description

1. Integrated design and source, high capacity LiFePO4 lithium battery,high energy,and long life, light weights, green and environmentalprotection, do not produce any harmful substances.
2. Best selling items with high brightness and good market acceptance, which can bring better sales to stores and wholesalers
- 3.All series use high efficiency controller which can increase 15%-30% charge efficiency
- 4.Design with high efficiency solar cell (>23%)
- 5.Convenient installation and maintenance, no need of cableinstallation or special light pole, functional components modular design, installation and maintenance, convenient and quick replacement

Model	LF-AYT05-400W	LF-AYT05-600W	LF-AYT05-800W
Solar Panel(MONO)	15W	18W	25W
High Capacity Lithium Battery	8AH	12AH	15AH
Shell material	ABS	ABS	ABS
Recommend Installation Height	4m	5m	5m
Solar Panel Charge Time	4-6 hours	4-6 hours	4-6 hours
Rainy Days Support	3 rainy days	3 rainy days	3 rainy days
Working Time (Per day)	≥12 hours	≥12 hours	≥12 hours
Color Temperature	6500K	6500K	6500K
Light Pole Diameter	φ50mm	φ50mm	φ50mm
Illuminated area	150-180m²	200-230m²	230-260m²
chip	5730SMD/480PCS	5730SMD/640PCS	5730SMD/800PCS
Waterproof Level	IP65	IP65	IP65
Product Dimensions	465*299*72mm	550*299*72mm	628*299*72mm



SOLAR STREET LIGHT SERIES



Product Description

- 1. Integrated design and source, high capacity LiFePO4 lithium battery,high energy,and long life, light weights, green and environmentalprotection, do not produce any harmful substances.
- 2. Best selling items with high brightness and good market acceptance, which can bring better sales to stores and wholesalers
- 3.All series use high efficiency controller which can increase 15%-30% charge efficiency
- 4.Design with high efficiency solar cell (>23%)
- 5.Convenient installation and maintenance, no need of cableinstallation or special light pole, functional components modular design, installation and maintenance, convenient and quick replacement

Model	LF-AYT06-800W	LF-AYT06-1200W	LF-AYT06-1600W
Solar Panel(MONO)	15W	25W	28W
High Capacity Lithium Battery	15AH	20AH	25AH
Shell material	ABS	ABS	ABS
Recommend Installation Height	4m	5m	6m
Solar Panel Charge Time	4-6 hours	4-6 hours	4-6 hours
Rainy Days Support	3 rainy days	3 rainy days	3 rainy days
Working Time (Per day)	≥12 hours	≥12 hours	≥12 hours
Color Temperature	6500K	6500K	6500K
Light Pole Diameter	φ50mm	φ50mm	φ50mm
Illuminated area	150-180m²	200-230m²	230-260m²
chip	5730SMD/576PCS	5730SMD/864PCS	5730SMD/1152PCS
Waterproof Level	IP65	IP65	IP65
Product Dimensions	452*350*72mm	615*350*72mm	693*350*72mm

***ELECTRIC
LED STREET LIGHT***



LED STREET LIGHT SERIES



Product Description

- 1. Die cast aluminum material, the lamp has undergone surface passivation treatment, fluorocarbon electrostatic spraying, and anodizing, which are three anti-corrosion processes
- 2. 150LM/W high luminous efficiency, excellent energy-saving performance.
- 3. Optional light-controlled sensor, auto on/off for smart operation.
- 4. Equipped with 6KV overvoltage protection, with options for 10KV or 20KV devices
- 5. High transparency tempered glass face mask effectively improves light efficiency.

Model	LF-LED01-50W	LF-LED01-100W	LF-LED01-150W	LF-LED01-200W
Watt	50W	100W	150W	200W
Product Dimensions	470*180*110mm	560*240*115mm	690*280*130mm	740*280*130mm
Shell material	Aluminum	Aluminum	Aluminum	Aluminum
LED chip	3030SMD/60PCS	3030SMD/96PCS	3030SMD/150PCS	3030SMD/216PCS
lighting effect	150lm/W	150lm/W	150lm/W	150lm/W
Voltage	AC85-265V	AC85-265V	AC85-265V	AC85-265V
Color Temperature	3000~6500K	3000~6500K	3000~6500K	3000~6500K
Waterproof Level	IP65	IP65	IP65	IP65
Light Pole Diameter	φ60mm	φ60mm	φ60mm	φ60mm
working temperature	-20~55℃	-20~55℃	-20~55℃	-20~55℃
Package Dimensions	53*24*12cm	62*29*15cm	74*34*15cm	79*34*15cm
Packing Way	1PCS/CTN	1PCS/CTN	1PCS/CTN	1PCS/CTN
Application Fields	Streets, highways, gardens,courtyard,plaza,park			



LED STREET LIGHT SERIES



Product Description

1. Die cast aluminum material, the lamp has undergone surface passivation treatment, fluorocarbon electrostatic spraying, and anodizing, which are three anti-corrosion processes
2. 110LM/W high luminous efficiency, excellent energy-saving performance.
3. Optional light-controlled sensor, auto on/off for smart operation.
4. High cost-effectiveness and market acceptance of best-selling products can bring better sales to stores and wholesalers
5. Wide voltage AC100-265V compatibility, suitable for global power grids.

Model	LF-LED02-50W	LF-LED02-100W	LF-LED02-150W	LF-LED02-200W
Watt	50W	100W	150W	200W
Product Dimensions	445*117*75mm	500*132*75mm	565*167*75mm	685*200*75mm
Shell material	Aluminum	Aluminum	Aluminum	Aluminum
LED chip	2835SMD/72PCS	2835SMD/144PCS	2835SMD/216PCS	2835SMD/290pcs
lighting effect	110lm/W	110lm/W	110lm/W	110lm/W
Voltage	AC100-265V	AC100-265V	AC100-265V	AC100-265V
Color Temperature	3000~6500K	3000~6500K	3000~6500K	3000~6500K
Waterproof Level	IP65	IP65	IP65	IP65
Light Pole Diameter	φ60mm	φ60mm	φ60mm	φ60mm
working temperature	-20~55°C	-20~55°C	-20~55°C	-20~55°C
Package Dimensions	40*26*46.5cm	40*28*52.5cm	58*40*19cm	71*53.5*25.5cm
Packing Way	10PCS/CTN	10PCS/CTN	5PCS/CTN	5PCS/CTN
Application Fields	Streets, highways, gardens,courtyard,plaza,park			



LED STREET LIGHT SERIES



Product Description

1. Die cast aluminum material, the lamp has undergone surface passivation treatment, fluorocarbon electrostatic spraying, and anodizing, which are three anti-corrosion processes
2. 150LM/W high luminous efficiency, excellent energy-saving performance.
3. Optional light-controlled sensor, auto on/off for smart operation.
4. Equipped with 6KV overvoltage protection, with options for 10KV or 20KV devices
5. High transparency tempered glass face mask effectively improves light efficiency.

Model	LF-LED03-100W	LF-LED03-150W	LF-LED03-200W	LF-LED03-250W	LF-LED03-300W
Watt	100W	150W	200W	250W	300W
Product Dimensions	515*300*90mm	600*300*90mm	685*300*90mm	770*300*90mm	855*300*90mm
Shell material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
LED chip	5050SMD/2*50pcs	5050SMD/3*50pcs	5050SMD/4*50pcs	5050SMD/5*50pcs	5050SMD/6*50pcs
lighting effect	150or195lm/W	150or195lm/W	150or195lm/W	150or195lm/W	150or195lm/W
Voltage	AC85-265V	AC85-265V	AC85-265V	AC85-265V	AC85-265V
Color Temperature	3000~6500K	3000~6500K	3000~6500K	3000~6500K	3000~6500K
Waterproof Level	IP65	IP65	IP65	IP65	IP65
Light Pole Diameter	φ60mm	φ60mm	φ60mm	φ60mm	φ60mm
working temperature	-20~55°C	-20~55°C	-20~55°C	-20~55°C	-20~55°C
Package Dimensions	55*32*11cm	66*32*11cm	72*32*11cm	78*32*11cm	98*32*11cm
Packing Way	1PCS/CTN	1PCS/CTN	1PCS/CTN	1PCS/CTN	1PCS/CTN
Application Fields	Streets, highways, gardens,courtyard,plaza,park				



LED STREET LIGHT SERIES



Product Description

- 1. Die cast aluminum material, the lamp has undergone surface passivation treatment, fluorocarbon electrostatic spraying, and anodizing, which are three anti-corrosion processes
- 2. 100LM/W high luminous efficiency, excellent energy-saving performance.
- 4. High cost-effectiveness and market acceptance of best-selling products can bring better sales to stores and wholesalers
- 5. Wide voltage AC85-265V compatibility, suitable for global power grids.

Model	LF-LED04-50W	LF-LED04-100W	LF-LED04-150W	LF-LED04-200W
Watt	50W	100W	150W	200W
Product Dimensions	450*125*60mm	500*142*60mm	560*173*60mm	630*195*60mm
Shell material	Aluminum	Aluminum	Aluminum	Aluminum
LED chip	2835SMD/72PCS	2835SMD/120PCS	2835SMD/180PCS	2835SMD/240pcs
lighting effect	90-100lm/W	90-100lm/W	90-100lm/W	90-100lm/W
Voltage	AC85-265V	AC85-265V	AC85-265V	AC85-265V
Color Temperature	3000~6500K	3000~6500K	3000~6500K	3000~6500K
Waterproof Level	IP65	IP65	IP65	IP65
Light Pole Diameter	φ60mm	φ60mm	φ60mm	φ60mm
working temperature	-20~55°C	-20~55°C	-20~55°C	-20~55°C
Package Dimensions	46.5*35.5*41cm	51.5*38.5*45cm	57.5*41.5*36.5cm	64*41.5*41.5cm
Packing Way	30PCS/CTN	30PCS/CTN	20PCS/CTN	20PCS/CTN
Application Fields	Streets, highways, gardens,courtyard,plaza,park			



LED STREET LIGHT SERIES



Product Description

- 1. Die cast aluminum material, the lamp has undergone surface passivation treatment, fluorocarbon electrostatic spraying, and anodizing, which are three anti-corrosion processes
- 2. 100LM/W high luminous efficiency, excellent energy-saving performance.
- 3. Optional light-controlled sensor, auto on/off for smart operation.
- 4. High cost-effectiveness and market acceptance of best-selling products can bring better sales to stores and wholesalers
- 5. Wide voltage AC85-265V compatibility, suitable for global power grids.



Model	LF-LED05-50W	LF-LED05-100W	LF-LED05-150W	LF-LED05-200W
Watt	50W	100W	150W	200W
Product Dimensions	530*158*100mm	583*177*100mm	645*214*100mm	717*244*100mm
Shell material	Aluminum	Aluminum	Aluminum	Aluminum
LED chip	2835SMD/72PCS	2835SMD/120PCS	2835SMD/216PCS	2835SMD/288pcs
lighting effect	90-100lm/W	90-100lm/W	90-100lm/W	90-100lm/W
Voltage	AC85-265V	AC85-265V	AC85-265V	AC85-265V
Color Temperature	3000~6500K	3000~6500K	3000~6500K	3000~6500K
Waterproof Level	IP65	IP65	IP65	IP65
Light Pole Diameter	φ60mm	φ60mm	φ60mm	φ60mm
working temperature	-20~55℃	-20~55℃	-20~55℃	-20~55℃
Package Dimensions	54.5*38.5*34cm	62*35*37cm	65.5*36.5*44.5cm	72.5*51*25.5cm
Packing Way	12PCS/CTN	12PCS/CTN	12PCS/CTN	8PCS/CTN
Application Fields	Streets, highways, gardens,courtyard,plaza,park			



LED STREET LIGHT SERIES



Product Description

- 1. Die cast aluminum material, the lamp has undergone surface passivation treatment, fluorocarbon electrostatic spraying, and anodizing, which are three anti-corrosion processes
- 2. 195LM/W high luminous efficiency, excellent energy-saving performance.
- 3. Optional light-controlled sensor, auto on/off for smart operation.
- 4. Equipped with 6KV overvoltage protection, with options for 10KV or 20KV devices
- 5. High transparency tempered glass face mask effectively improves light efficiency.

Model	LF-LED06-50W	LF-LED06-100W	LF-LED06-150W	LF-LED06-200W
Watt	50W	100W	150W	200W
Product Dimensions	600*230*93mm	650*230*93mm	745*280*93mm	740*280*130mm
Shell material	Aluminum	Aluminum	Aluminum	Aluminum
LED chip	7070	7070	7070	7070
lighting effect	195lm/W	195lm/W	195lm/W	195lm/W
Voltage	AC85-265V	AC85-265V	AC85-265V	AC85-265V
Color Temperature	3000~6500K	3000~6500K	3000~6500K	3000~6500K
Waterproof Level	IP65	IP65	IP65	IP65
Light Pole Diameter	φ60mm	φ60mm	φ60mm	φ60mm
working temperature	-20~55℃	-20~55℃	-20~55℃	-20~55℃
Package Dimensions	64*26*11.5cm	67.5*26*11.5cm	79*30.5*11.5cm	91*30.5*11.5cm
Packing Way	1PCS/CTN	1PCS/CTN	1PCS/CTN	1PCS/CTN
Application Fields	Streets, highways, gardens,courtyard,plaza,park			



LED STREET LIGHT SERIES



Product Description

1. Die cast aluminum material, the lamp has undergone surface passivation treatment, fluorocarbon electrostatic spraying, and anodizing, which are three anti-corrosion processes
2. 100LM/W high luminous efficiency, excellent energy-saving performance.
3. Optional light-controlled sensor, auto on/off for smart operation.
4. High cost-effectiveness and market acceptance of best-selling products can bring better sales to stores and wholesalers
5. Wide voltage AC85-265V compatibility, suitable for global power grids.

Model	LF-LED07-50W	LF-LED07-100W	LF-LED07-150W	LF-LED07-200W
Watt	50W	100W	150W	200W
Product Dimensions	390*160*75mm	470*200*75mm	530*220*75mm	600*250*75
Shell material	Aluminum	Aluminum	Aluminum	Aluminum
LED chip	72pcs/3030SMD	144pcs/3030SMD	192pcs/3030SMD	252pcs/3030SMD
lighting effect	100lm/W	100lm/W	100lm/W	100lm/W
Voltage	AC100-265V	AC100-265V	AC100-265V	AC100-265V
Color Temperature	3000~6500K	3000~6500K	3000~6500K	3000~6500K
Waterproof Level	IP65	IP65	IP65	IP65
Light Pole Diameter	φ60mm	φ60mm	φ60mm	φ60mm
working temperature	-20~55°C	-20~55°C	-20~55°C	-20~55°C
Package Dimensions	43*33*40.5cm	43*40.5*48cm	53.5*43*23cm	60.5*43*26cm
Packing Way	10PCS/CTN	10PCS/CTN	5PCS/CTN	5PCS/CTN
Application Fields	Streets, highways, gardens,courtyard,plaza,park			



LED STREET LIGHT SERIES



Product Description

1. Die cast aluminum material, the lamp has undergone surface passivation treatment, fluorocarbon electrostatic spraying, and anodizing, which are three anti-corrosion processes
2. 195LM/W high luminous efficiency, excellent energy-saving performance.
3. Optional light-controlled sensor, auto on/off for smart operation.
4. Equipped with 6KV overvoltage protection, with options for 10KV or 20KV devices
5. High transparency tempered glass face mask effectively improves light efficiency.


Model	LF-LED08-50W	LF-LED08-100W	LF-LED08-150W	LF-LED08-200W	LF-LED03-300W
Watt	50W	100W	150W	200W	300W
Product Dimensions	220*515*85mm	220*565*84mm	240*635*85mm	290*665*85mm	340*810*88mm
Shell material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
LED chip	7070 or 5050	7070 or 5050	7070 or 5050	7070 or 5050	7070 or 5050
lighting effect	195 or 150lm/W	195 or 150lm/W	195 or 150lm/W	195 or 150lm/W	195 or 150lm/W
Voltage	AC85-265V	AC85-265V	AC85-265V	AC85-265V	AC85-265V
Color Temperature	3000~6500K	3000~6500K	3000~6500K	3000~6500K	3000~6500K
Waterproof Level	IP65	IP65	IP65	IP65	IP65
Light Pole Diameter	φ60mm	φ60mm	φ60mm	φ60mm	φ60mm
working temperature	-20~55℃	-20~55℃	-20~55℃	-20~55℃	-20~55℃
Package Dimensions	43*25*15cm	48*27*15cm	55*29*15cm	58*33.5*15cm	70.5*39.5*16.5cm
Packing Way	1PCS/CTN	1PCS/CTN	1PCS/CTN	1PCS/CTN	1PCS/CTN
Application Fields	Streets, highways, gardens,courtyard,plaza,park				



ELECTRIC FLOODLIGHT SERIES



LED FLOODLIGHT



product picture	model	Lamp body size	Package size	voltage	wattage	LED
	LF-FGD01 -10W	85*65*16mm	47*31*16.5cm 100pcs	AC180-260V	10W	2835SMD 14PCS
	LF-FGD01 -20W	100*80*16mm	44*31*19.5cm 80pcs	AC180-260V	20W	2835SMD 24PCS
	LF-FGD01 -30W	130*95*16mm	42.5*31*22.5cm 60pcs	AC180-260V	30W	2835SMD 36PCS
	LF-FGD01 -50W	155*115*17mm	50*31*26.5cm 60pcs	AC180-260V	50W	2835SMD 72PCS
	LF-FGD01 -100W	200*165*17mm	42.5*31*36.5cm 40pcs	AC180-260V	100W	2835SMD 144PCS
	LF-FGD01 -150W	240*195*20mm	50.5*31*22cm 20pcs	AC180-260V	150W	2835SMD 180PCS
	LF-FGD01 -200W	275*235*20mm	45*29.5*26cm 15pcs	AC180-260V	200W	2835SMD 252PCS
	LF-FGD01 -300W	315*265*20mm	33.5*31*29cm 10pcs	AC180-260V	300W	2835SMD 360PCS



LED FLOODLIGHT



product picture	model	Lamp body size	Package size	voltage	wattage	LED
	LF-FGD02-50W	241*201*58mm	52*38*23cm 10pcs	AC85-265V	50W	50W*1PCS
	LF-FGD02-100W	297*245*65mm	53*46*32.5cm 10pcs	AC85-265V	100W	50W*2PCS
	LF-FGD02-150W	343*297*65mm	51*36.5*32cm 6pcs	AC85-265V	150W	50W*3PCS
	LF-FGD02-200W	343*297*65mm	51*36.5*32cm 6pcs	AC85-265V	200W	50W*4PCS
	LF-FGD02-300W	420*315*75mm	43*33*10cm 1pcs	AC85-265V	300W	50W*6PCS
	LF-FGD02-400W	528*346*85mm	54*36*10.5cm 1pcs	AC85-265V	400W	50W*8PCS
	LF-FGD02-500W	628*357*87mm	64*37*10.5cm 1pcs	AC85-265V	500W	50W*10PCS
	LF-FGD02-600W	628*357*87mm	64*37*10.5cm 1pcs	AC85-265V	400W	50W*12PCS




LED FLOODLIGHT



thermal management

By utilizing advanced feather technology to optimize the structure,
Achieve longer service life at low cost

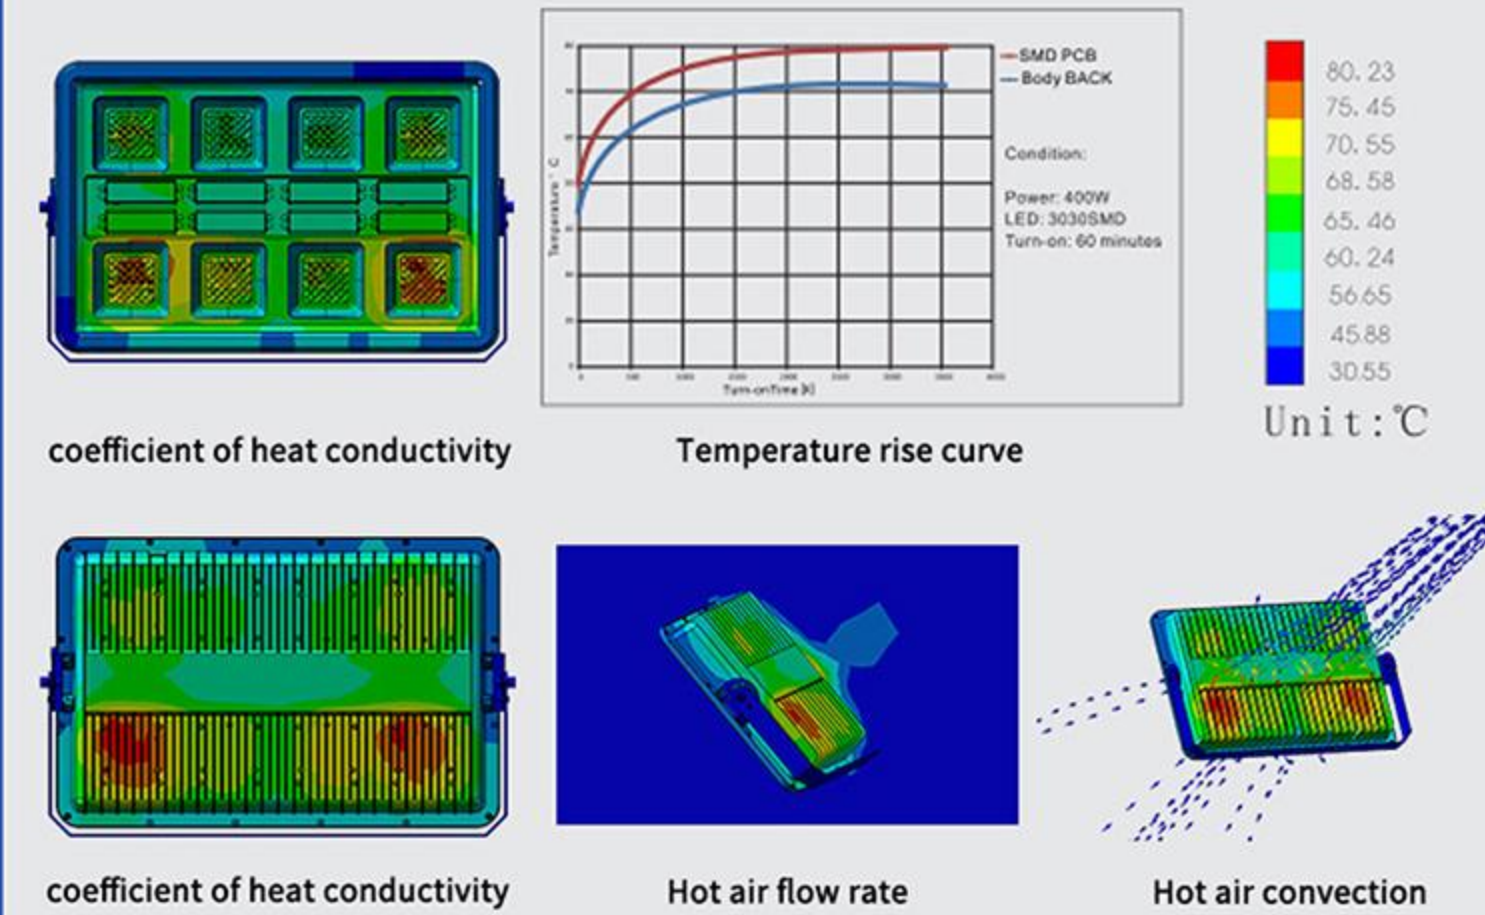

product picture	model	Lamp body size	Package size	voltage	wattage	LED
	LF-FGD03-200W	360*290*76mm	43*37.5*32.5cm 5pcs	AC85-265V	200W	50W*4PCS
	LF-FGD03-300W	425*310*76mm	44*33*9.5cm 1pcs	AC85-265V	300W	50W*6PCS
	LF-FGD03-400W	550*340*76mm	56*36.5*9.5cm 1pcs	AC85-265V	400W	50W*8PCS
	LF-FGD03-500W	630*350*78mm	64*37.5*9.5cm 1pcs	AC85-265V	500W	50W*10PCS
	LF-FGD03-600W	675*350*96mm	68.5*36*11cm 1pcs	AC85-265V	600W	50W*12PCS
	LF-FGD03-800W	830*355*96mm	83.5*36*11cm 1pcs	AC85-265V	800W	50W*16PCS
	LF-FGD03-1000W	975*355*100mm	98*37*11.5cm 1pcs	AC85-265V	1000W	50W20PCS



LED FLOODLIGHT



195LM/W



product picture	model	Lamp body size	Package size	voltage	wattage	LED
	LF-FGD04-50W	28*74*138mm	36.5*17.5*15cm 1pcs	AC85-265V	50W	7070
	LF-FGD04-100W	328*154*138mm	36.5*17.5*15cm 1pcs	AC85-265V	100W	7070
	LF-FGD04-150W	328*234*138mm	36.5*26.5*15cm 1pcs	AC85-265V	150W	7070
	LF-FGD04-200W	328*314*138mm	36.5*33*15cm 1pcs	AC85-265V	200W	7070
	LF-FGD04-250W	328*395*138mm	36.5*41.5*15cm 1pcs	AC85-265V	250W	7070
	LF-FGD04-300W	328*476*138mm	36.5*50*15cm 1pcs	AC85-265V	300W	7070



LED FLOODLIGHT



product picture	model	Lamp body size	lumen	voltage	wattage	LED
	LF-FGD05-50W	258*218*50mm	120LM/W	AC85-265V	50W	2835
	LF-FGD05-100W	315*262*55mm	120LM/W	AC85-265V	100W	2835
	LF-FGD05-150W	331*307*55mm	120LM/W	AC85-265V	150W	2835
	LF-FGD05-200W	383*328*55mm	120LM/W	AC85-265V	200W	2835
	LF-FGD05-300W	465*430*61mm	120LM/W	AC85-265V	300W	2835




LED FLOODLIGHT



product picture	model	Lamp body size	Package size	voltage	wattage	LED
	LF-FGD06-30W	155*128*23.8mm	34.5*31*18cm 20pcs	AC85-265V	30W	3030
	LF-FGD06-50W	185*145*23.8mm	47.1*37*19.5cm 20pcs	AC85-265V	50W	3030
	LF-FGD06-100W	245*190*23.8mm	47.5*37*30.5cm 20pcs	AC85-265V	100W	3030
	LF-FGD06-150W	305*231*23.8mm	36.2*37*28.8cm 10pcs	AC85-265V	150W	3030
	LF-FGD06-200W	355*260*23.8mm	40.7*19.5*31.8cm 5pcs	AC85-265V	200W	3030
	LF-FGD06-300W	400*290*25mm	45.6*19.5*35.5cm 5pcs	AC85-265V	300W	3030
	LF-FGD06-400W	440*320*25mm	50.5*20*40cm 5pcs	AC85-265V	400W	3030



LED FLOODLIGHT

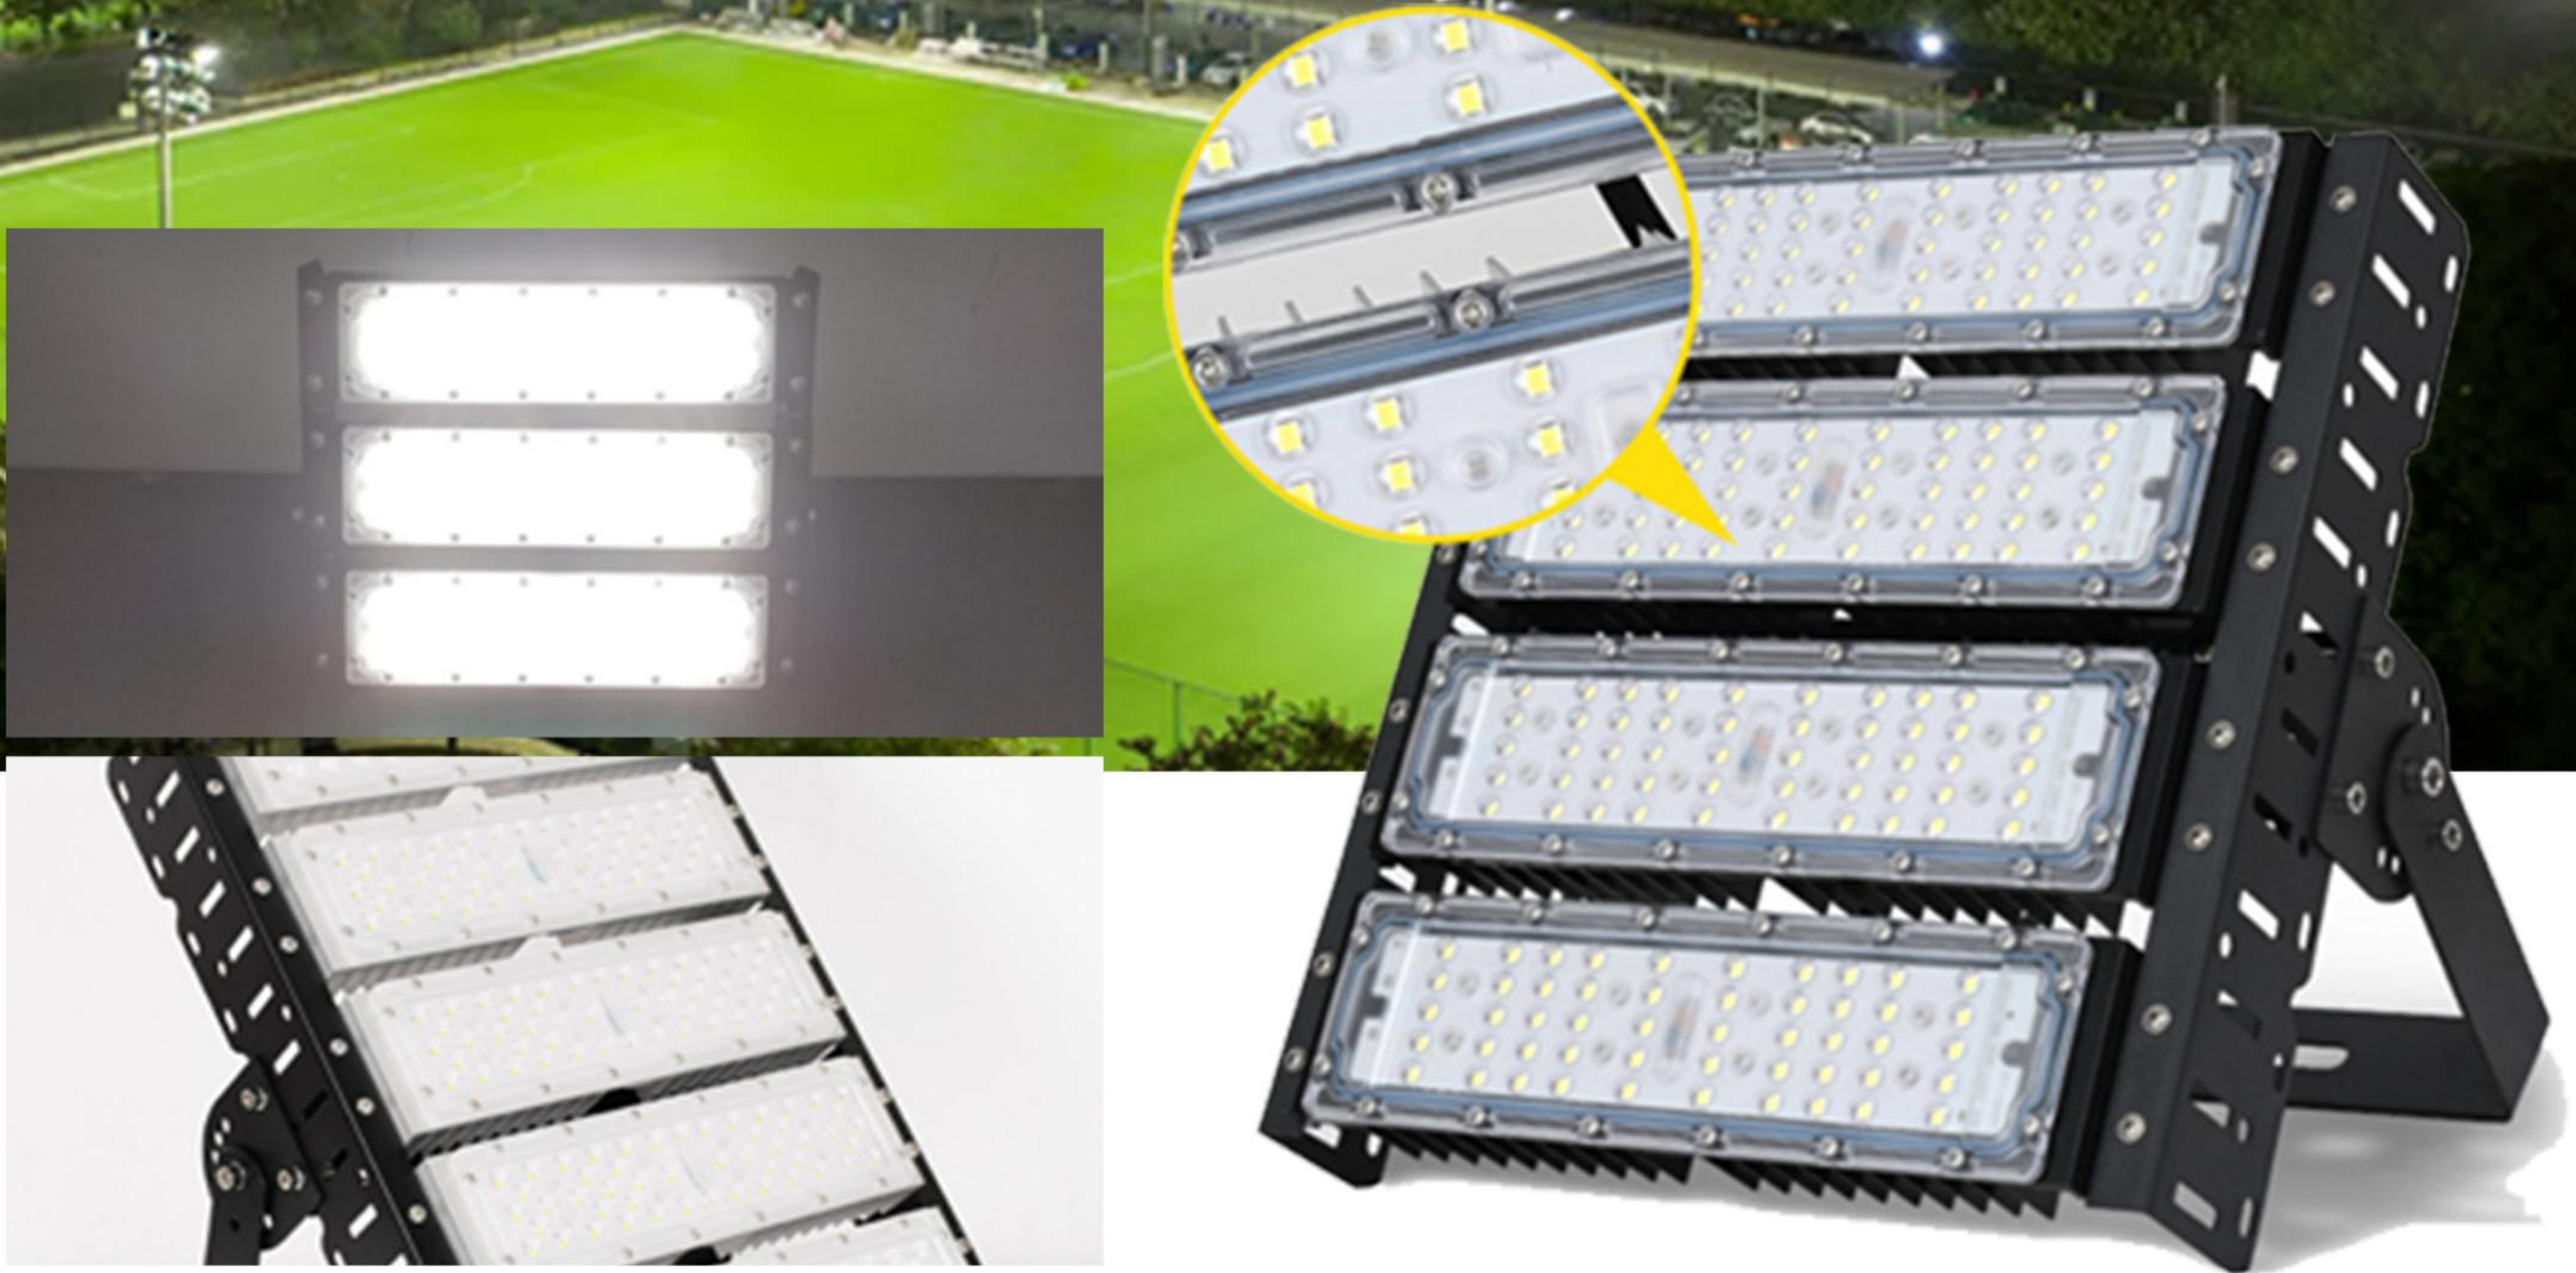


product picture	model	Lamp body size	Package size	voltage	lumen	LED
	LF-FGD07-50W	70*315*220mm	30*34*15cm 1pcs	AC85-265V	150LM/W	3030
	LF-FGD07-100W	150*315*220mm	20*33*15cm 1pcs	AC85-265V	150LM/W	3030
	LF-FGD07-150W	230*315*220mm	26*34*15cm 1pcs	AC85-265V	150LM/W	3030
	LF-FGD07-200W	310*315*220mm	35*34*15cm 1pcs	AC85-265V	150LM/W	3030
	LF-FGD07-250W	390*315*220mm	45*34*15cm 1pcs	AC85-265V	150LM/W	3030
	LF-FGD07-300W	470*315*220mm	52*34*15cm 1pcs	AC85-265V	150LM/W	3030
	LF-FGD07S-400W	316*630*260mm	36*66*14.5cm 1pcs	AC85-265V	150LM/W	3030
	LF-FGD07S-500W	396*630*260mm	45*66*14.5cm 1pcs	AC85-265V	150LM/W	3030



CUSTOMIZED

Customized streetlights

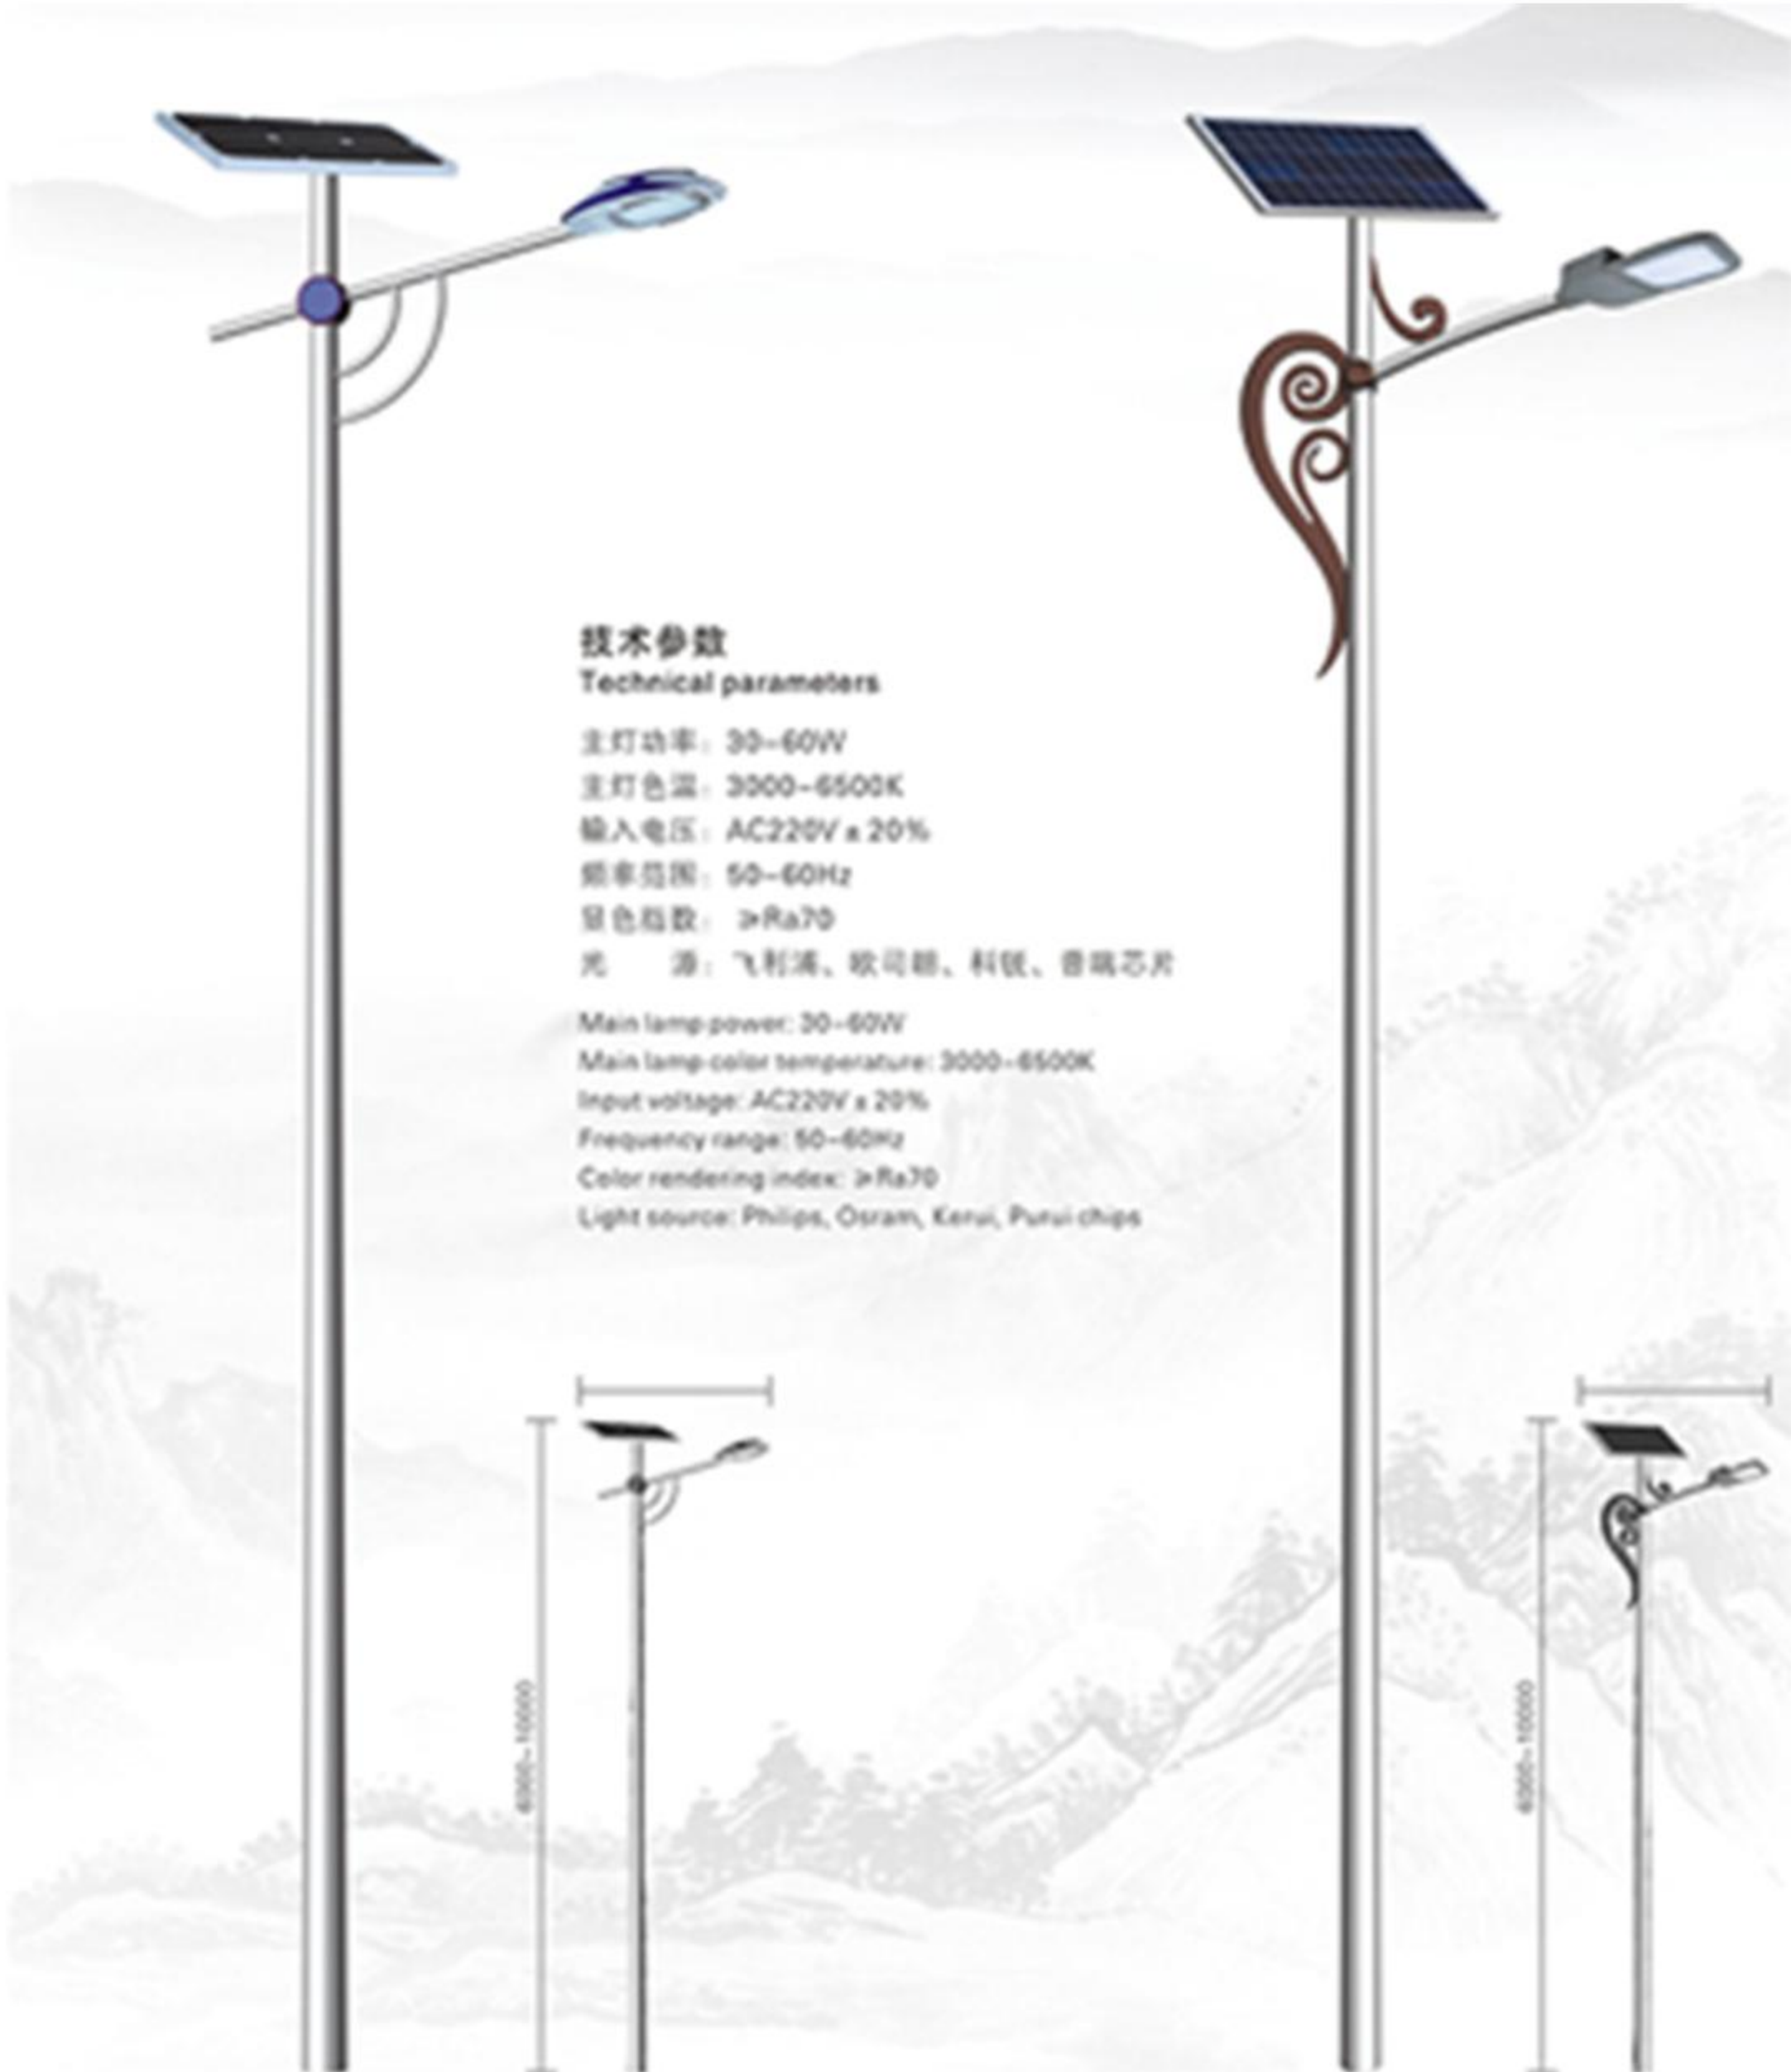

JC-26702 H:6-10m



JC-26801 H:6-1



height	6-10M	chip	LED	Ra	Ra>80
INPUT VOLTAGE	6V	Color temperature	3000-6500K	working temperature	-20~+50°C
service life	30000H	warranty	3 years	color	custom

Customized streetlights



height	6-10M	chip	LED	Ra	Ra>80
INPUT VOLTAGE	6V	Color temperature	3000-6500K	working temperature	-20~+50°C
service life	30000H	warranty	3 years	color	custom




JC-27102 H:8-12m



JC-27201 H:8-12m

技术参数
Technical parameters
灯体为Q235钢材卷制而成，灯体内外热镀锌防腐处理后喷涂户外氟碳漆。
光源配置：高亮度LED光源，光效高，显色性好
光源防护等级：IP65
紧固件：紧固螺栓、螺母为不锈钢
The lamp body is made of Q235 steel and sprayed with outdoor fluorocarbon paint after the inside and outside of the lamp are treated with hot dip galvanizing.
Light source configuration: high brightness LED light source, high light efficiency, good color rendering
Light source protection grade: IP65
Fasteners: fastening bolts and nuts of stainless steel

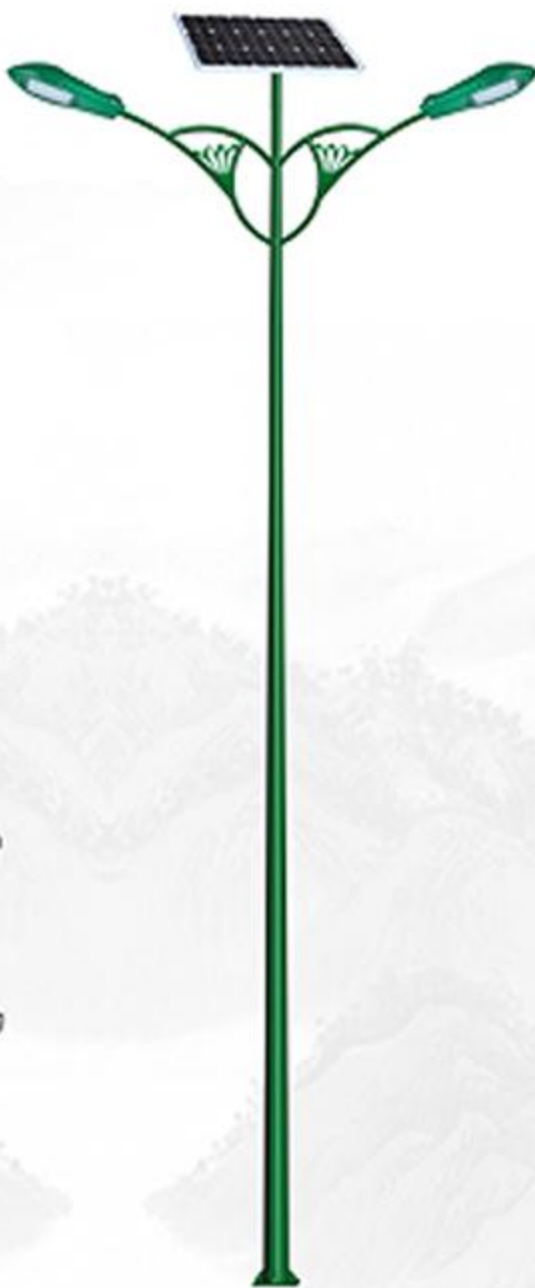

JC-27202 H:8-12m



JC-27301 H:8-12m



JC-27302 H:8-12m

技术参数
Technical parameters
灯体为Q235钢材卷制而成，灯体内外热镀锌防腐处理后喷涂户外氟碳漆。
光源配置：高亮度LED光源，光效高，显色性好
光源防护等级：IP65
紧固件：紧固螺栓、螺母为不锈钢
The lamp body is made of Q235 steel and sprayed with outdoor fluorocarbon paint after the inside and outside of the lamp are treated with hot dip galvanizing.
Light source configuration: high brightness LED light source, high light efficiency, good color rendering
Light source protection grade: IP65
Fasteners: fastening bolts and nuts of stainless steel



JC-27401 H:8-12m



height	6-10M	chip	LED	Ra	Ra>80
INPUT VOLTAGE	6V	Color temperature	3000-6500K	working temperature	-20~+50°C
service life	30000H	warranty	3 years	color	custom




height	6-10M	chip	LED	Ra	Ra>80
INPUT VOLTAGE	6V	Color temperature	3000-6500K	working temperature	-20~+50°C
service life	30000H	warranty	3 years	color	custom



JC-25001 H:6-10m



JC-25102 H:6-10m

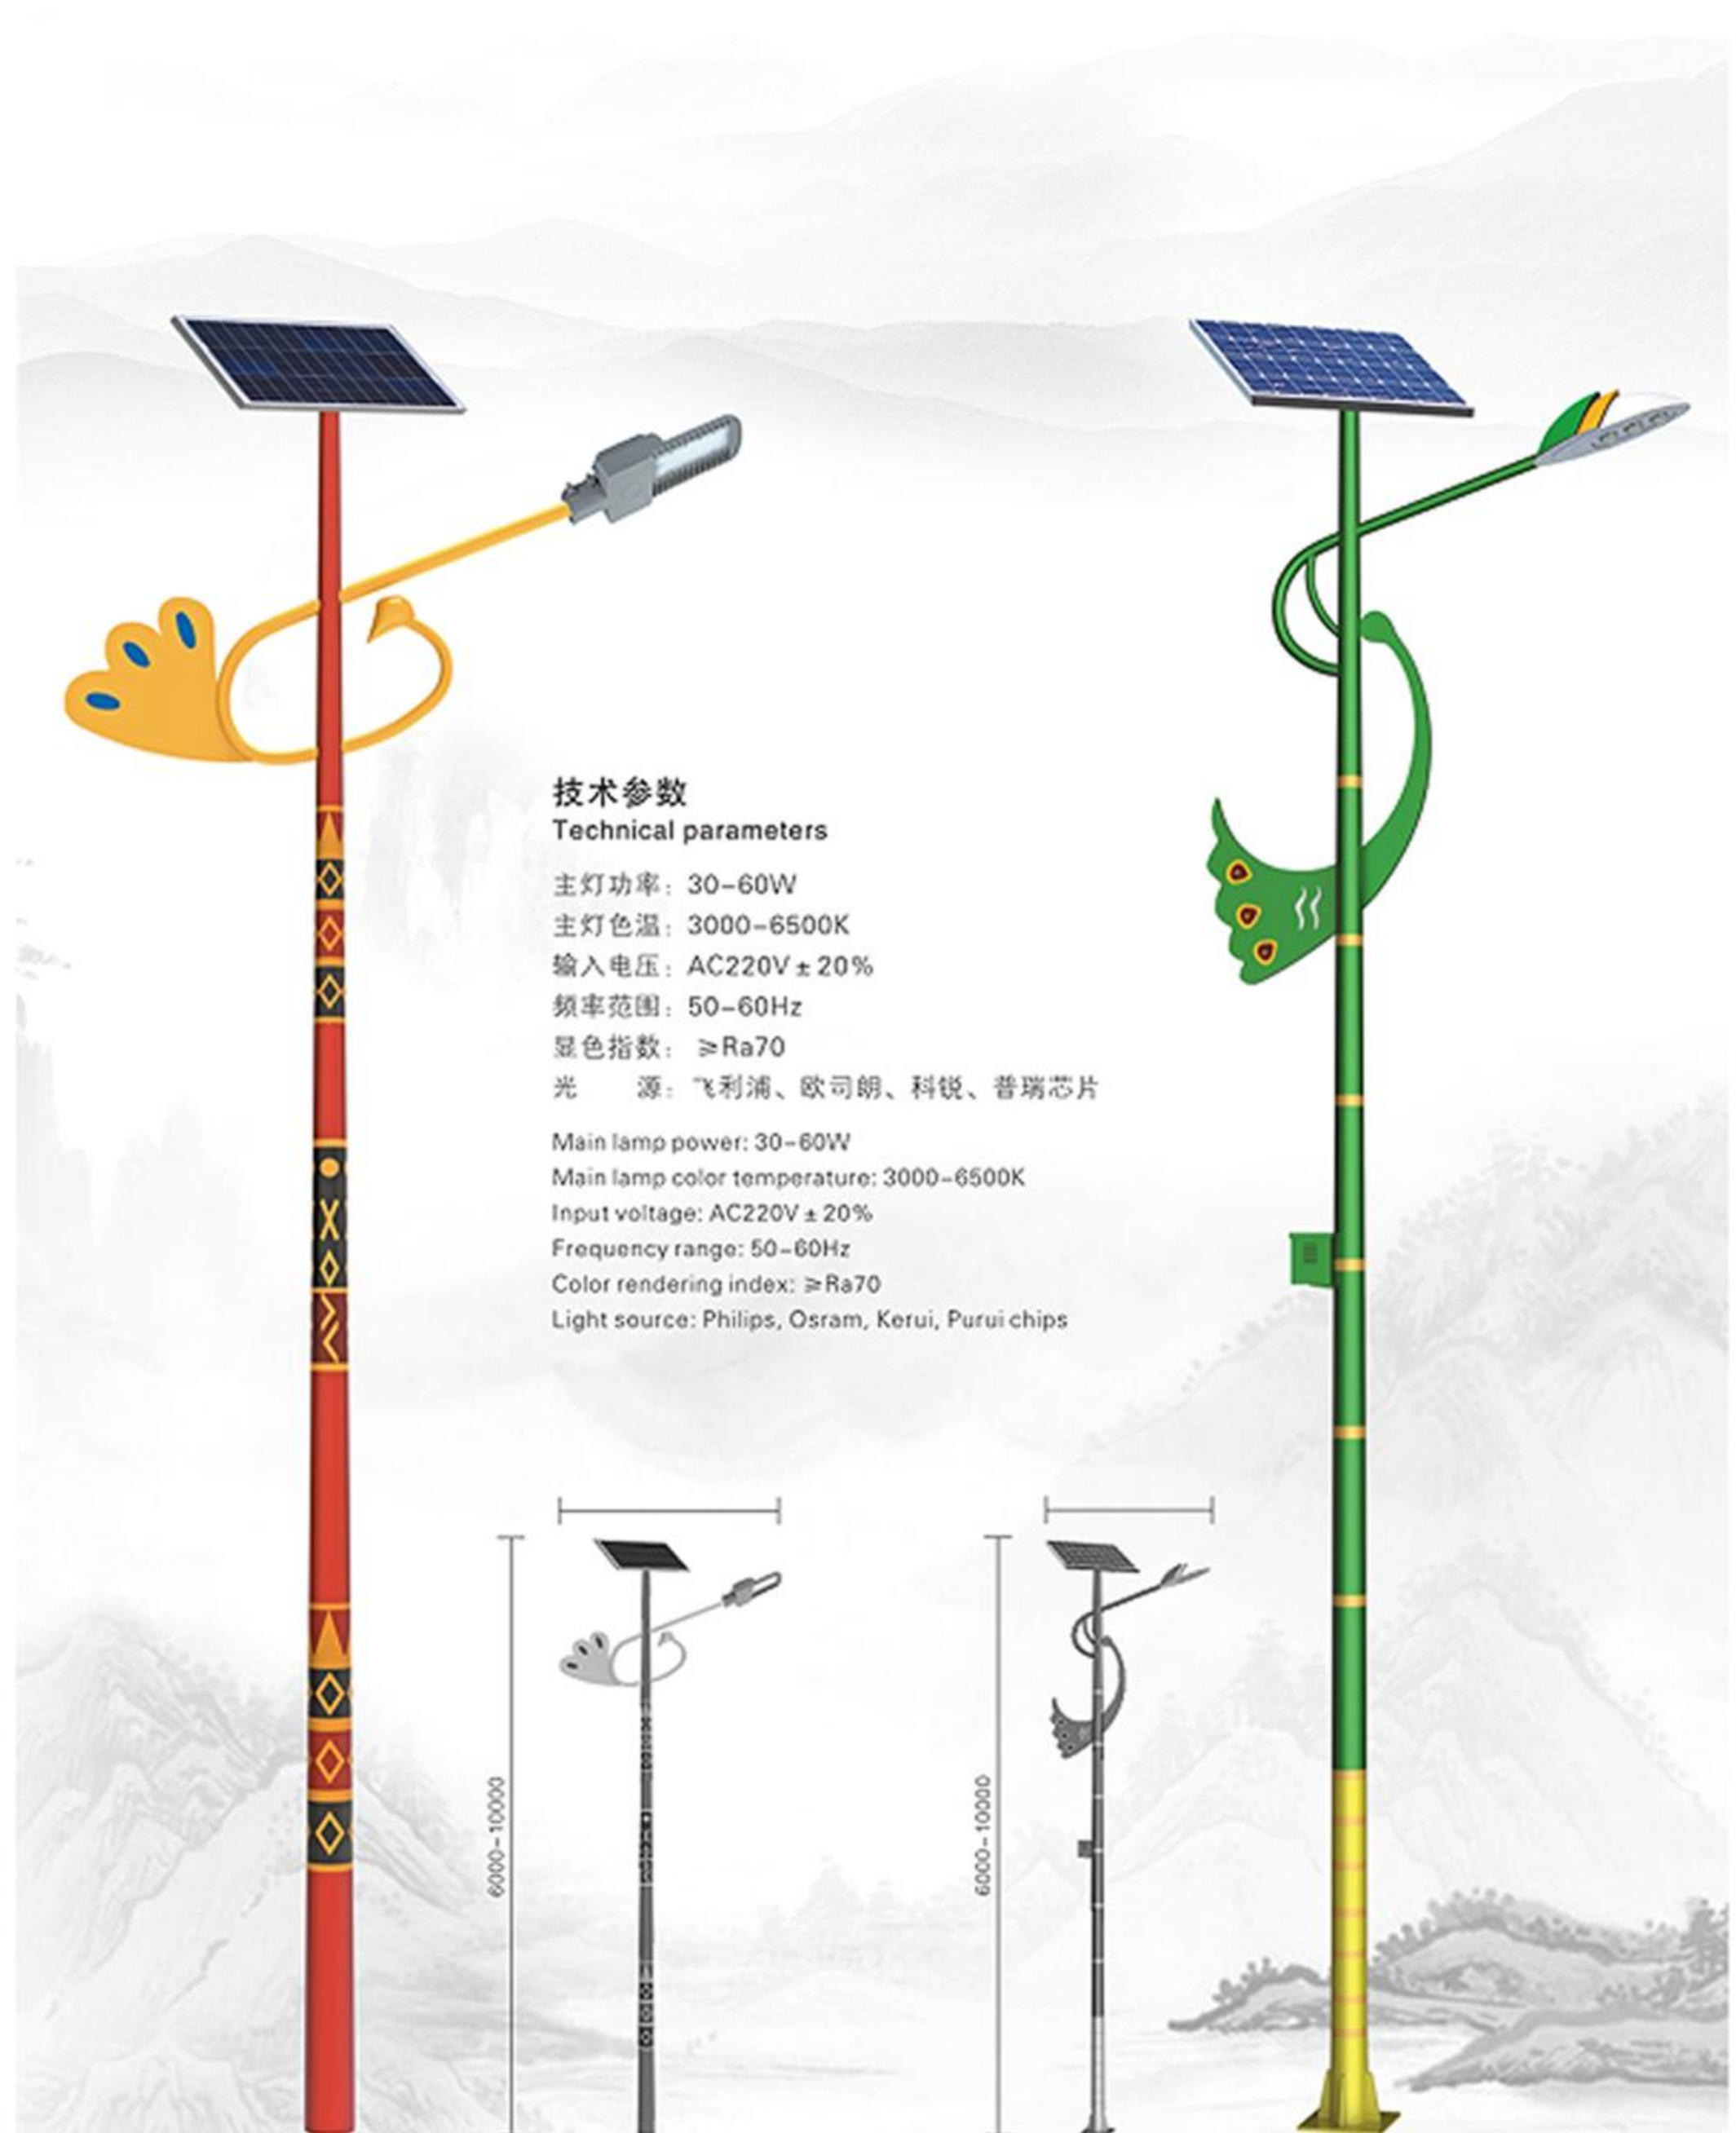

height	6-10M	chip	LED	Ra	Ra>80
INPUT VOLTAGE	6V	Color temperature	3000-6500K	working temperature	-20~+50°C
service life	30000H	warranty	3 years	color	custom

Customized streetlights




height	3-5M	chip	LED	Ra	Ra>80
INPUT VOLTAGE	AC85-265V	Color temperature	3000-6500K	working temperature	-20~+50°C
service life	30000H	warranty	3 years	color	custom



height	3-5M	chip	LED	Ra	Ra>80
INPUT VOLTAGE	AC85-265V	Color temperature	3000-6500K	working temperature	-20~+50°C
service life	30000H	warranty	3 years	color	custom



材质：灯杆采用铝型材质。LED光源：30-50W白光或暖黄光。适用场所：广场、口袋公园、商业街、小区等场所。

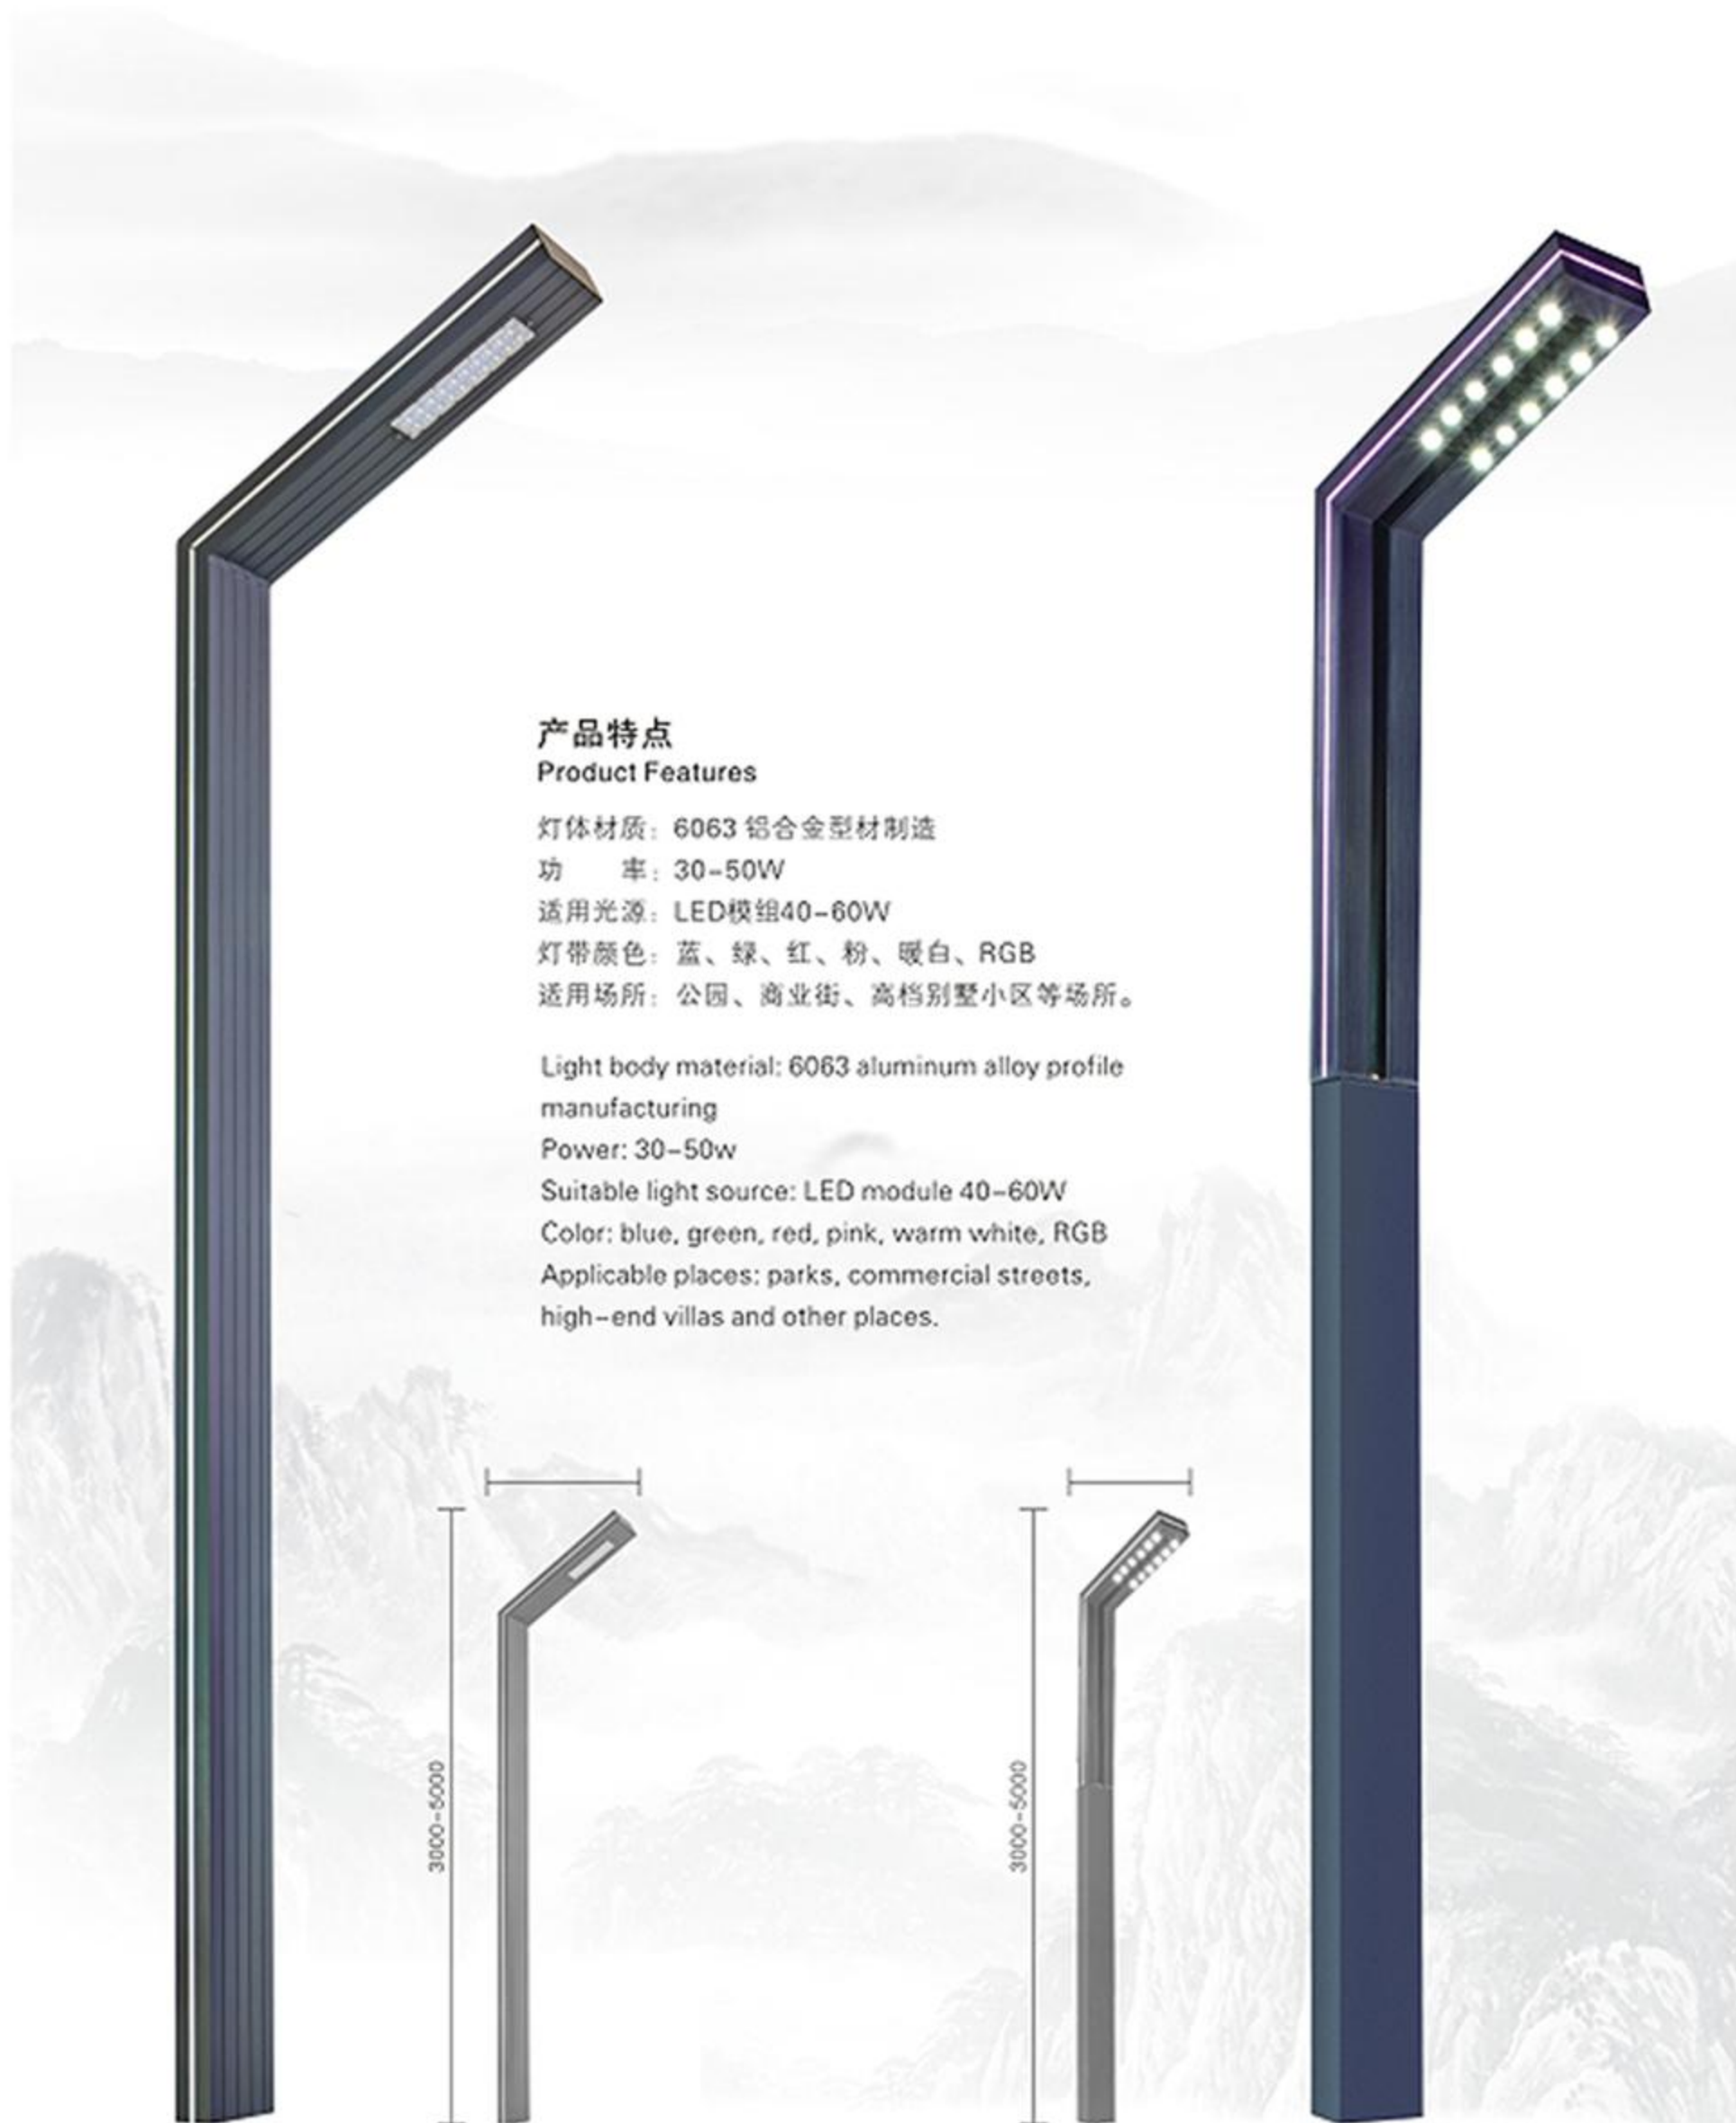

JC-33702 H:3-5m



JC-33801 H:3-5m

JC-33802 H:3-5m

height	3-5M	chip	LED	Ra	Ra>80
INPUT VOLTAGE	AC85-265V	Color temperature	3000-6500K	working temperature	-20~+50℃
service life	30000H	warranty	3 years	color	custom

Customized streetlights



JC-33901 H:3-5m

JC-33902 H:3-5m

JC-33903 H:3-5m



JC-34001
H:5-7m



JC-34101
H:3-5m



JC-34201 H:3-5m



height	3-5M	chip	LED	Ra	Ra>80
INPUT VOLTAGE	AC85-265V	Color temperature	3000-6500K	working temperature	-20~+50°C
service life	30000H	warranty	3 years	color	custom



height	3-5M	chip	LED	Ra	Ra>80
INPUT VOLTAGE	AC85-265V	Color temperature	3000-6500K	working temperature	-20~+50°C
service life	30000H	warranty	3 years	color	custom




JC-38501 H:4-6m




JC-38502 H:4-6m



JC-38503 H:4-6m

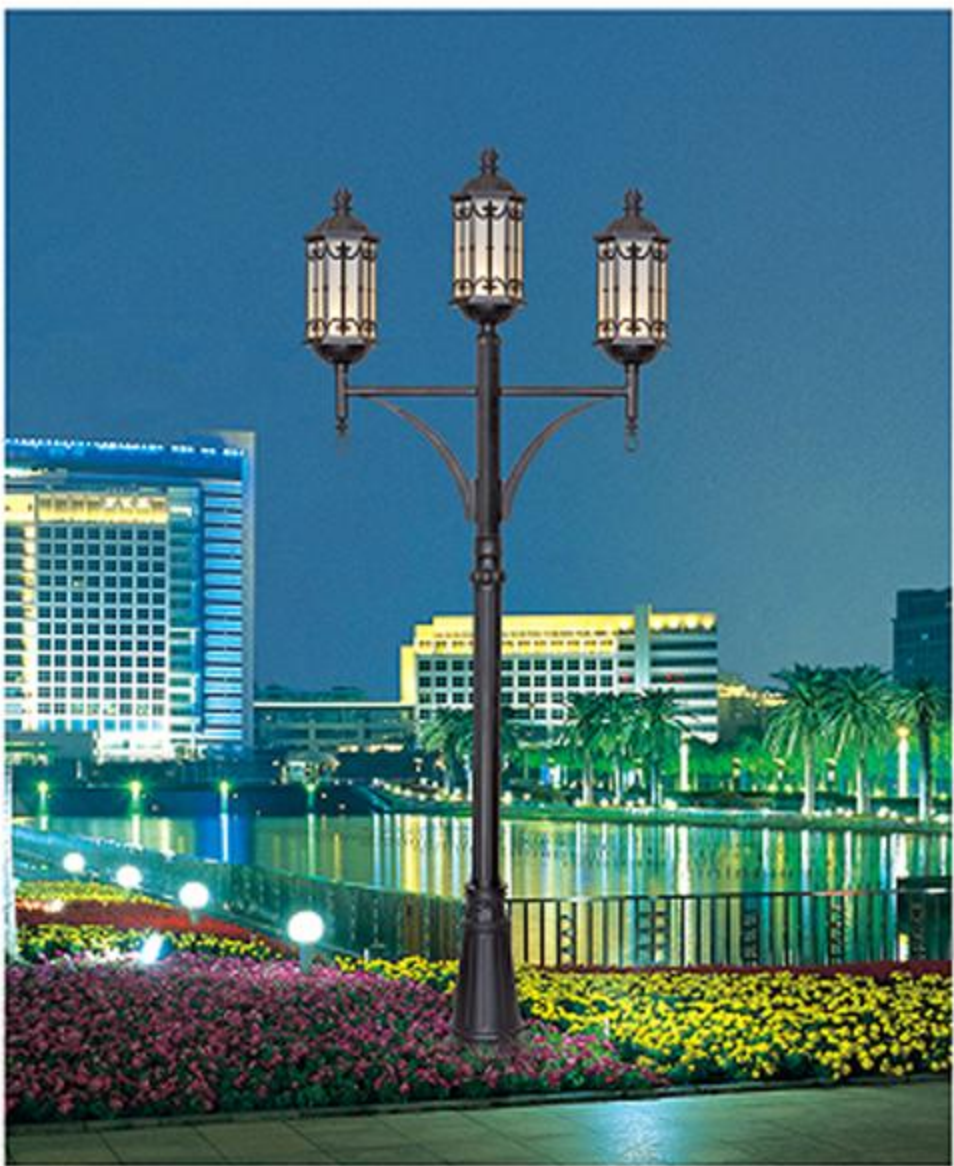

JC-38601 H:4-6m

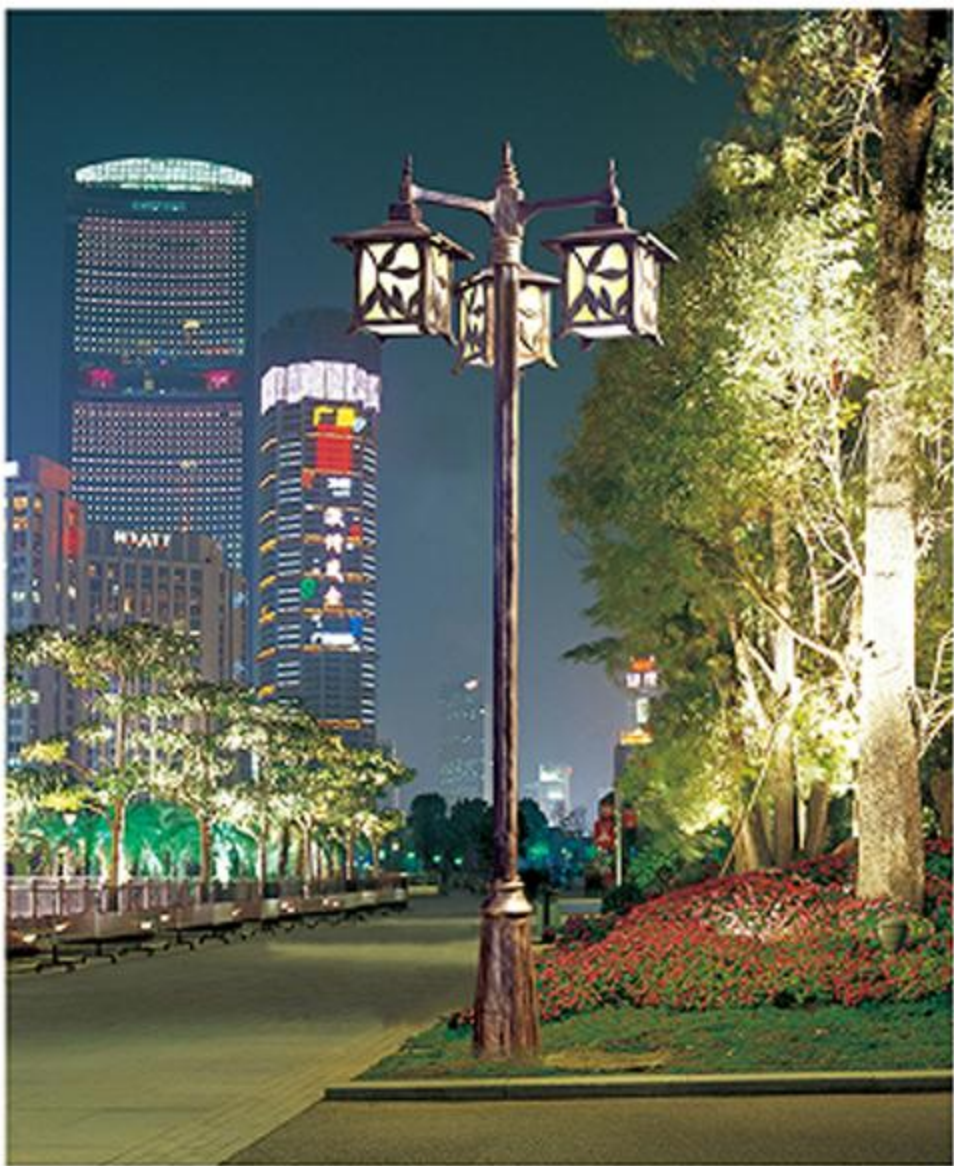

JC-38602 H:4-6m



JC-38701 H:4-6m



JC-38702 H:4-6m

新中式户外园林灯，是现代与中式的结合，升华了“雅”的意蕴，表现出清雅含蓄，端庄丰华的东方精神。总体造型端正稳健、格调优雅，充分体现中国传统美学精神。

The new Chinese outdoor garden lamp is a combination of modern and Chinese style, which sublimates the meaning of 'elegance' and shows the elegant implication, dignified and magnificent Oriental spirit. The overall shape is correct, steady, elegant style, fully reflects the spirit of traditional Chinese aesthetics.



JC-38801 H:4-6m



JC-38802 H:4-6m



JC-38803 H:4-6m



灯体材质：灯杆采用优质钢材
透光材料：透光罩为PMMA、PC
工艺：喷抗紫外线户外聚酯粉，防腐抗酸抗碱等性能
适用光源：LED或节能灯

Light body material: The lamp posts are made of high quality steel
Transmittance material: The transmittance mask is PMMA, PC
Process: Spray uv - resistant outdoor polyester powder, anti - corrosion, anti - acid anti - alkali and other properties
Light source: LED or energy-saving lamp



height	3-5M	chip	LED	Ra	Ra>80
INPUT VOLTAGE	AC85-265V	Color temperature	3000-6500K	working temperature	-20~+50°C
service life	30000H	warranty	3 years	color	custom



height	6-12M	chip	LED	Ra	Ra>80
INPUT VOLTAGE	AC85-265V	Color temperature	3000-6500K	working temperature	-20~+50℃
service life	30000H	warranty	3 years	color	custom



BH-8601 H:6-12m



BH-8603
H:6-12m



BH-8604
H:6-12m



BH-8605
H:6-12m



BH-8606
H:6-12m



height	6-12M	chip	LED	Ra	Ra>80
INPUT VOLTAGE	AC85-265V	Color temperature	3000-6500K	working temperature	-20~+50°C
service life	30000H	warranty	3 years	color	custom

Customized streetlights



BH-8901 H:6-12m



BH-8902
H:6-12m



BH-8903
H:6-12m



BH-8904
H:6-12m



BH-8905
H:6-12m



height	6-12M	chip	LED	Ra	Ra>80
INPUT VOLTAGE	AC85-265V	Color temperature	3000-6500K	working temperature	-20~+50°C
service life	30000H	warranty	3 years	color	custom



BH-12601 H:6-12m



BH-12603
H:6-12m



BH-12604
H:6-12m



BH-12605
H:6-12m




BH-12606
H:6-12m




height	6-12M	chip	LED	Ra	Ra>80
INPUT VOLTAGE	AC85-265V	Color temperature	3000-6500K	working temperature	-20~+50°C
service life	30000H	warranty	3 years	color	custom



JC-30801 H:8-15m

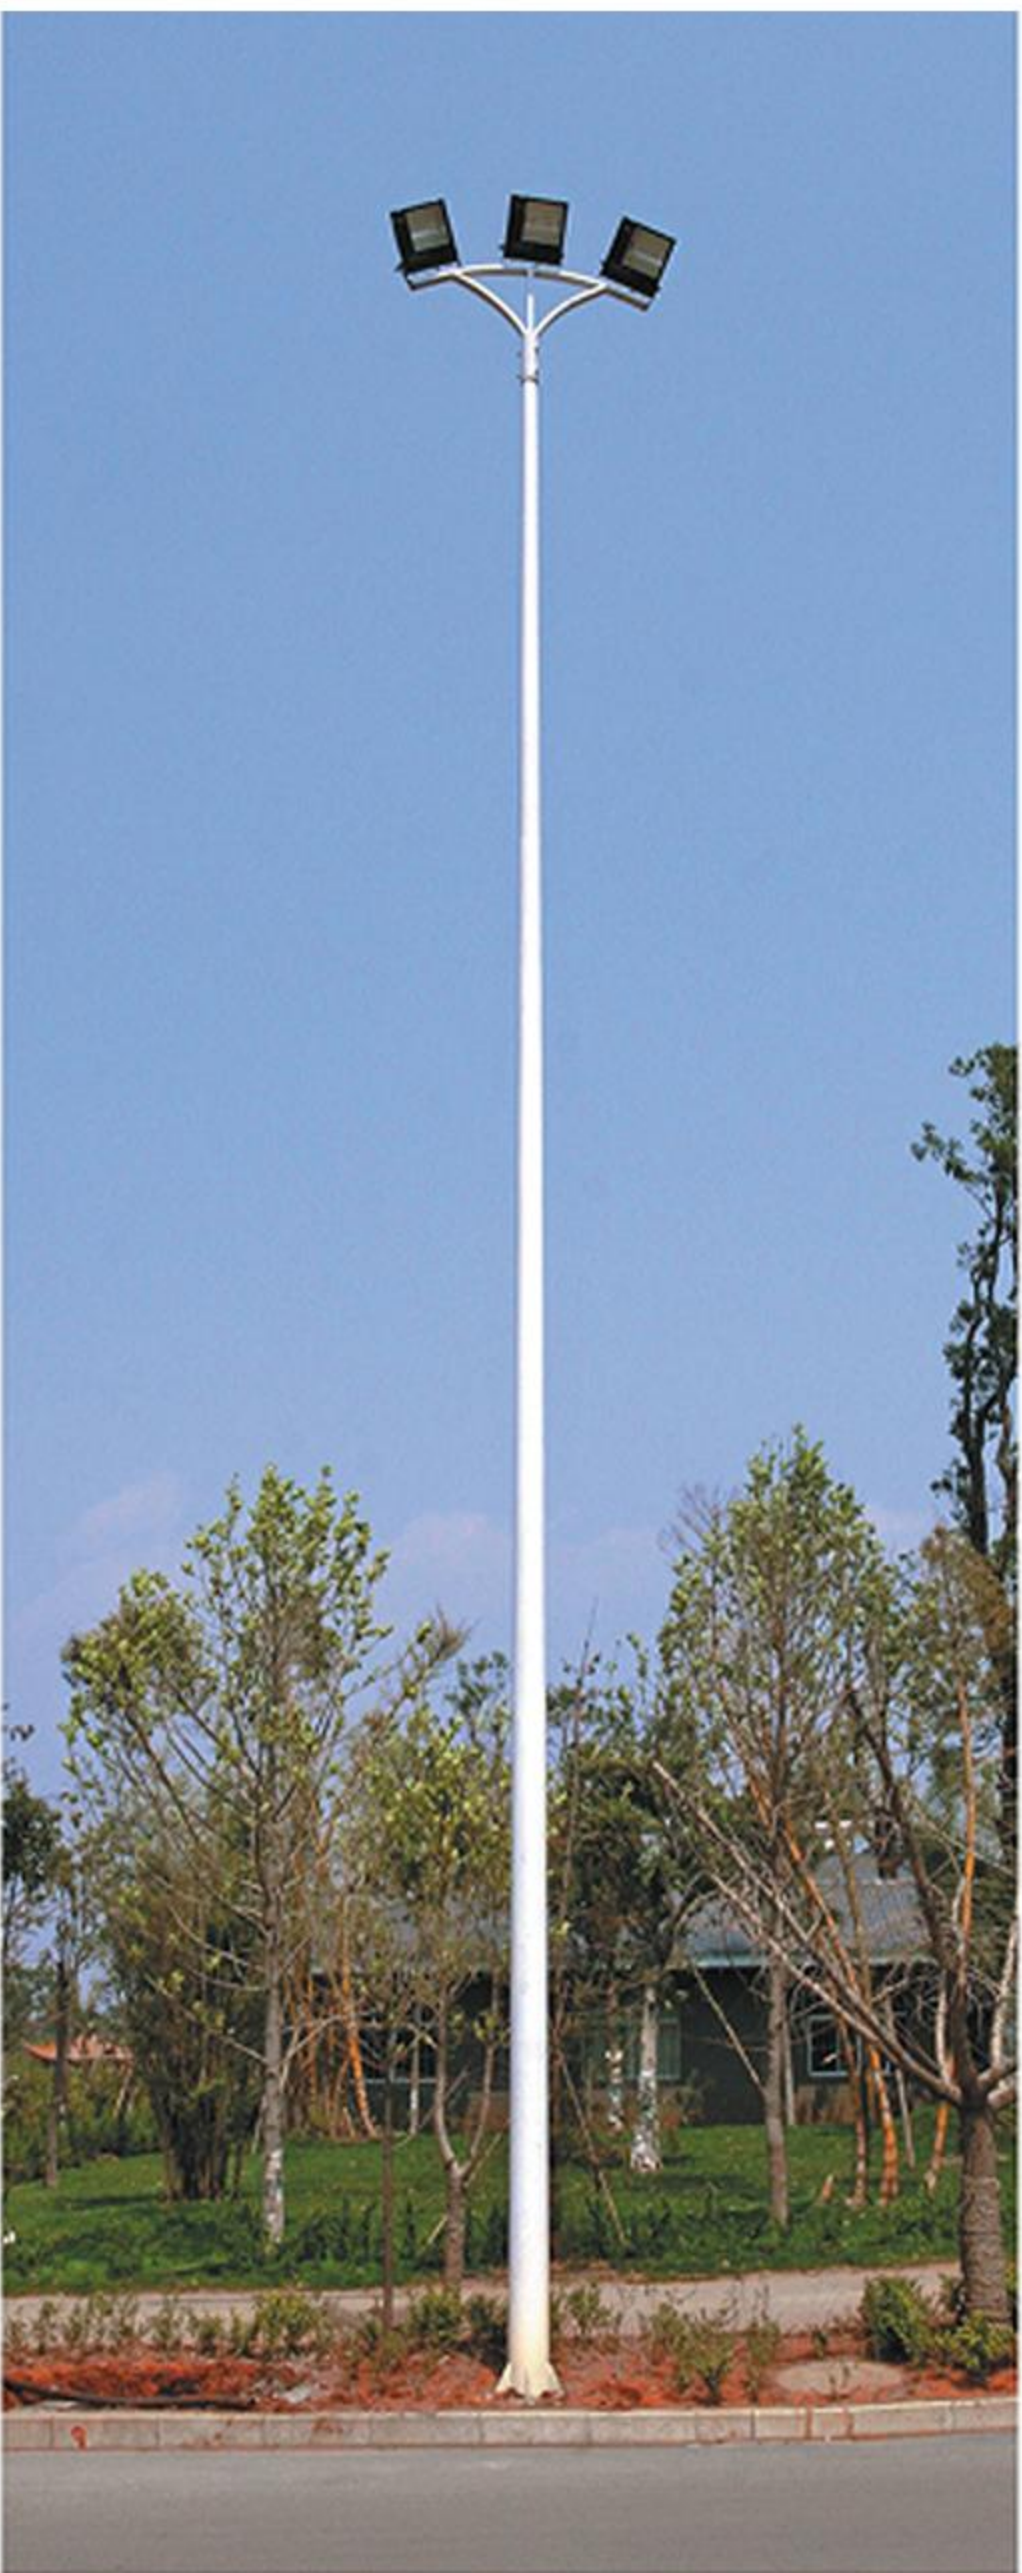

JC-31302 H:10-15m

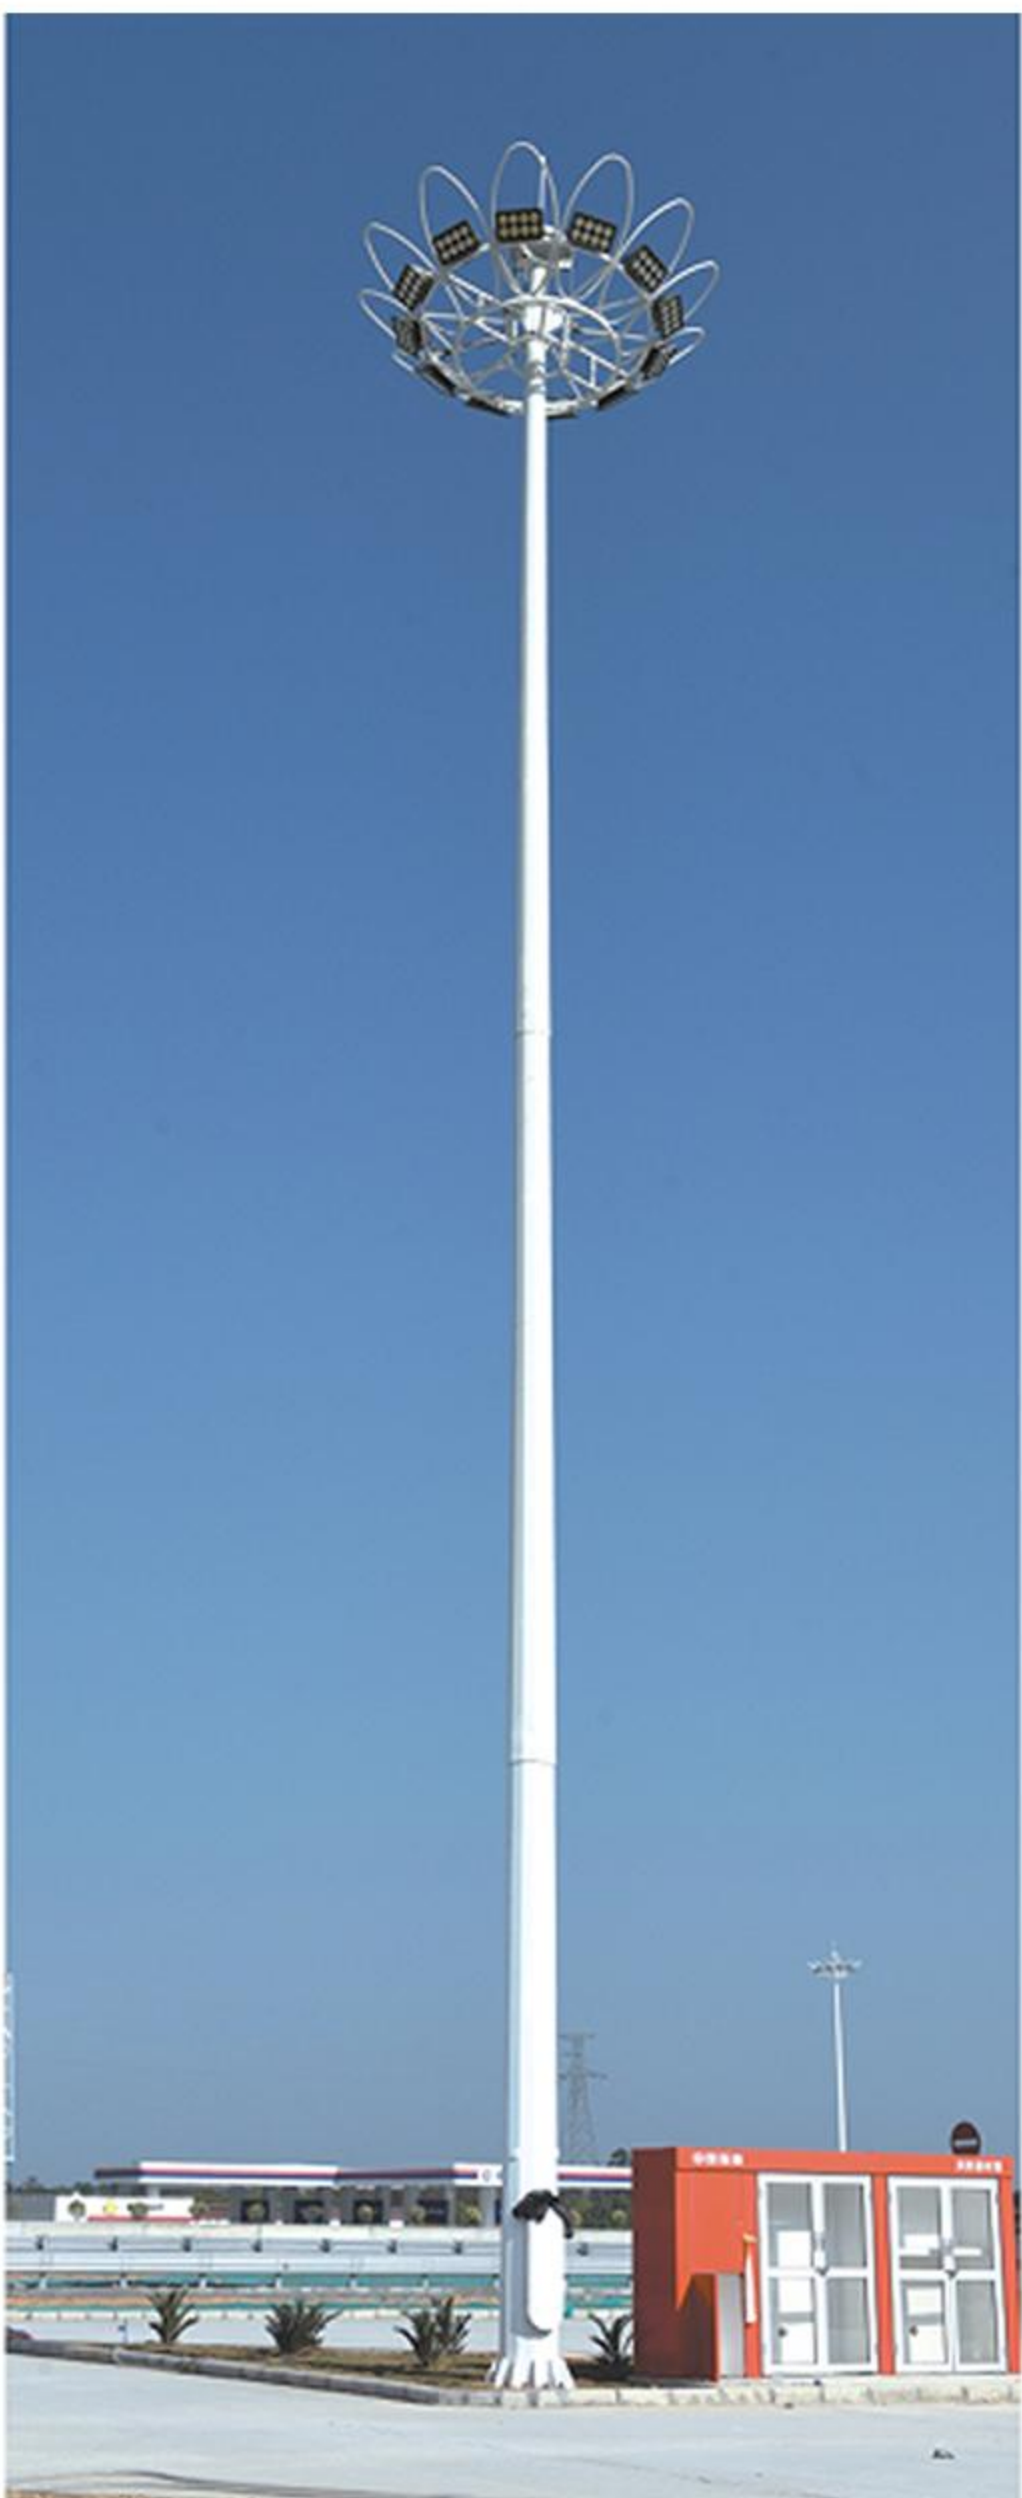

height	10-20M	chip	LED	Ra	Ra>80
INPUT VOLTAGE	AC85-265V	Color temperature	3000-6500K	working temperature	-20~+50°C
service life	30000H	warranty	3 years	color	custom



height	10-20M	chip	LED	Ra	Ra>80
INPUT VOLTAGE	AC85-265V	Color temperature	3000-6500K	working temperature	-20~+50℃
service life	30000H	warranty	3 years	color	custom



PL-78702 H:10-12m



height	10-20M	chip	LED	Ra	Ra>80
INPUT VOLTAGE	AC85-265V	Color temperature	3000-6500K	working temperature	-20~+50°C
service life	30000H	warranty	3 years	color	custom



PL-77002 H:15-20m



height	10-20M	chip	LED	Ra	Ra>80
INPUT VOLTAGE	AC85-265V	Color temperature	3000-6500K	working temperature	-20~+50℃
service life	30000H	warranty	3 years	color	custom

Split street light pole

Galvanized steel Durable

...

Stainless Steel Ball

Top light pole

Bottom light pole

Middle light pole

accessory



Special steel pipe for street lights

Segmented design for easier installation and transportation

Upper section $\phi 76\text{mm}$
The next section is $\phi 114\text{ mm}$

Before installation

After installation

Installation Steps

1. Drilling holes in the concrete floor using an electric drill.

2. Install the expansion screw into the corresponding hole.

3. Install the base in the corresponding hole of the expansion screw.

4. After the screws have been tightened that finished.

HIGH	CALIBER	SIZE	MATERIAL
3米 (1m+1m+1m)	Bottom bar: $\Phi 114\text{cm}$ Middle pole+mandrel: $\Phi 76\text{cm}$	Bottom bar:1.05m Middle pole+mandrel:1m	Q235 steel
4米 (1m+2m+1m)	Bottom bar: $\Phi 114\text{cm}$ Middle pole+mandrel: $\Phi 76\text{cm}$	Bottom bar:1.05m Middle pole+mandrel:1m	Q235 steel
5米 (1m+3m+1m)	Bottom bar: $\Phi 114\text{cm}$ Middle pole+mandrel: $\Phi 76\text{cm}$	Bottom bar:1.05m Middle pole+mandrel:1m	Q235 steel
6米 (1m+4m+1m)	Bottom bar: $\Phi 114\text{cm}$ Middle pole+mandrel: $\Phi 76\text{cm}$	Bottom bar:1.05m Middle pole+mandrel:1m	Q235 steel



Recommended Configurations

Height of poles	3m-50m
Shape of poles	Octagonal tapered;Straight square; Tubular stepped;Round conical;Polygon shaped;The shaft is folded into the desired shape using steel plates and longitudinally welded using an automatic welding machine
Material	Q235,Q345 steel,or equivalent
Arm/brackets	Single or double brackets/ arms;the shape and dimension as per customers requirement
Thickness	1.8mm-20mm
Welding	Internal and external double welding makes the welding beautiful in shape.And confirms with international welding standard of CWB,BS EN15614,Flaw testing has been past.
Base plate mounted	Base plate is square or round in shape with slotted holes for anchor bolt,dimension as per customers requirement.
surface treatment	Hot dip galvanization with thickness of 80-100μm average in accordance with Chinese standard GB/T 13912-2002 or American standard ASTM A123, IS: 2626-1985.BS EN ISO 1461
Wind resistance	According to customer's environment;Customized
Powder coating	Pure polyester powder painting, color is optional according to RAL Color stardand.
customized service	By communicating and offered

Engineering Cases



Vietnam

LED street light + 7m lamp post



Nigeria

LED street light + 9m lamp post



Germany

solar street light + 5m lamp post



Malaysia

solar street light 250W




Philippines

LED street light 300W



Saudi Arabia

LED street light 200W

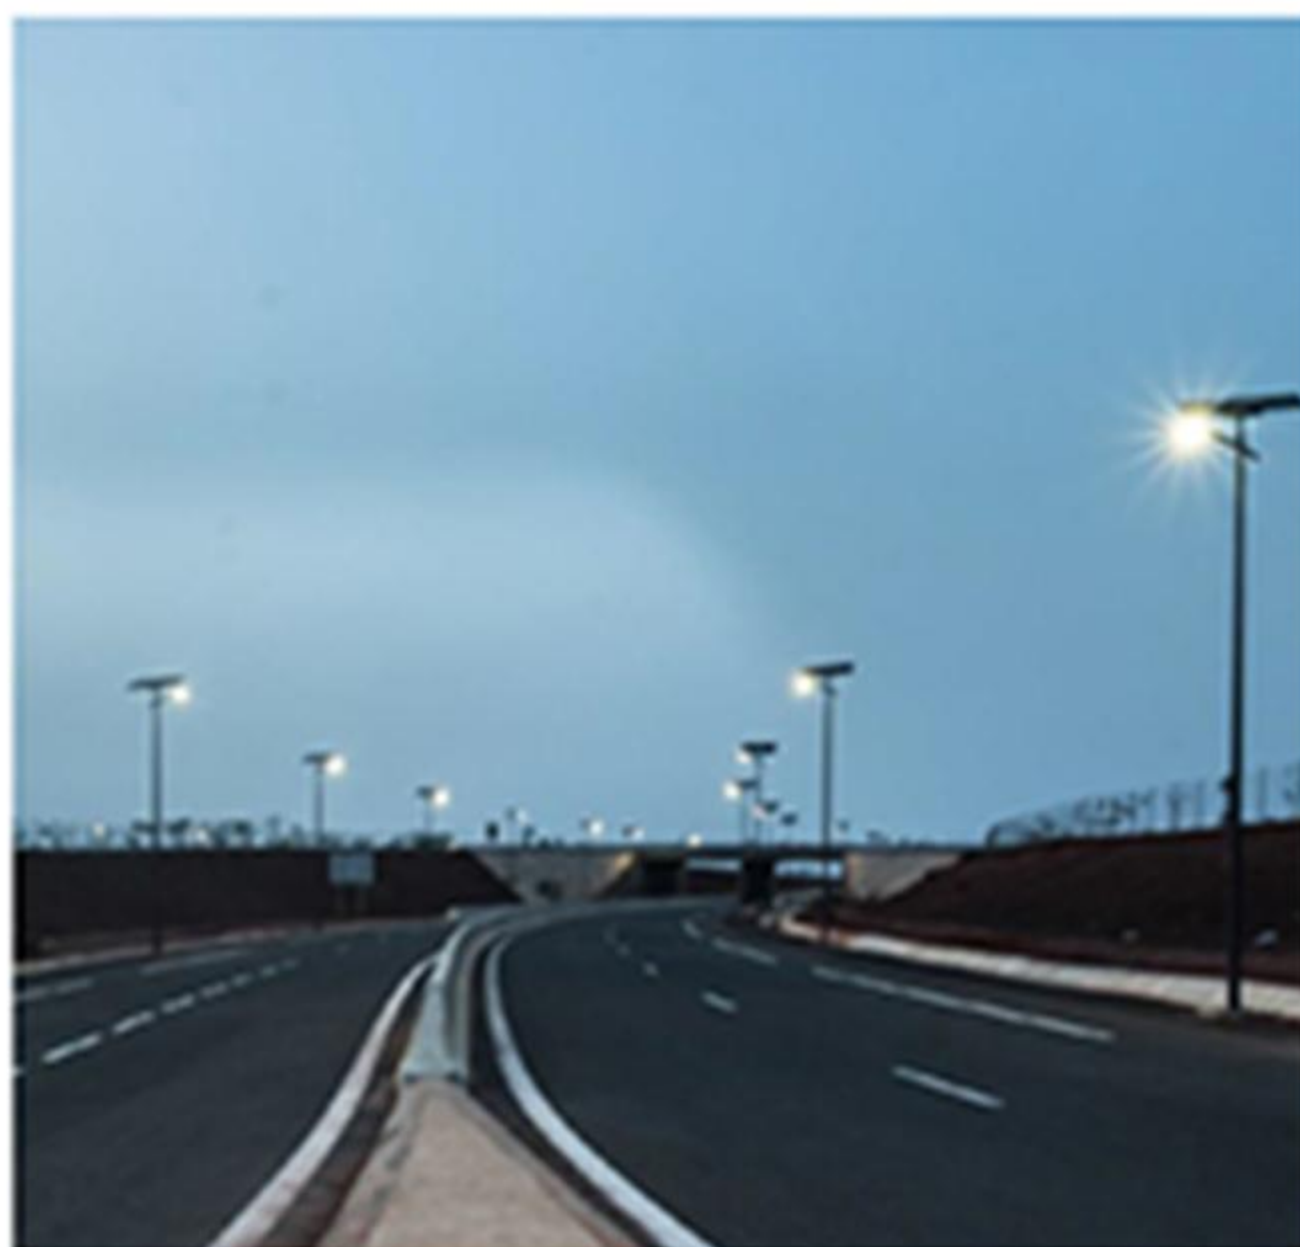

Senegal

solar street light



Kenya

solar street light 100W



Serbia

LED stadium light 1500W


Engineering Cases



Engineering Cases



Engineering Cases

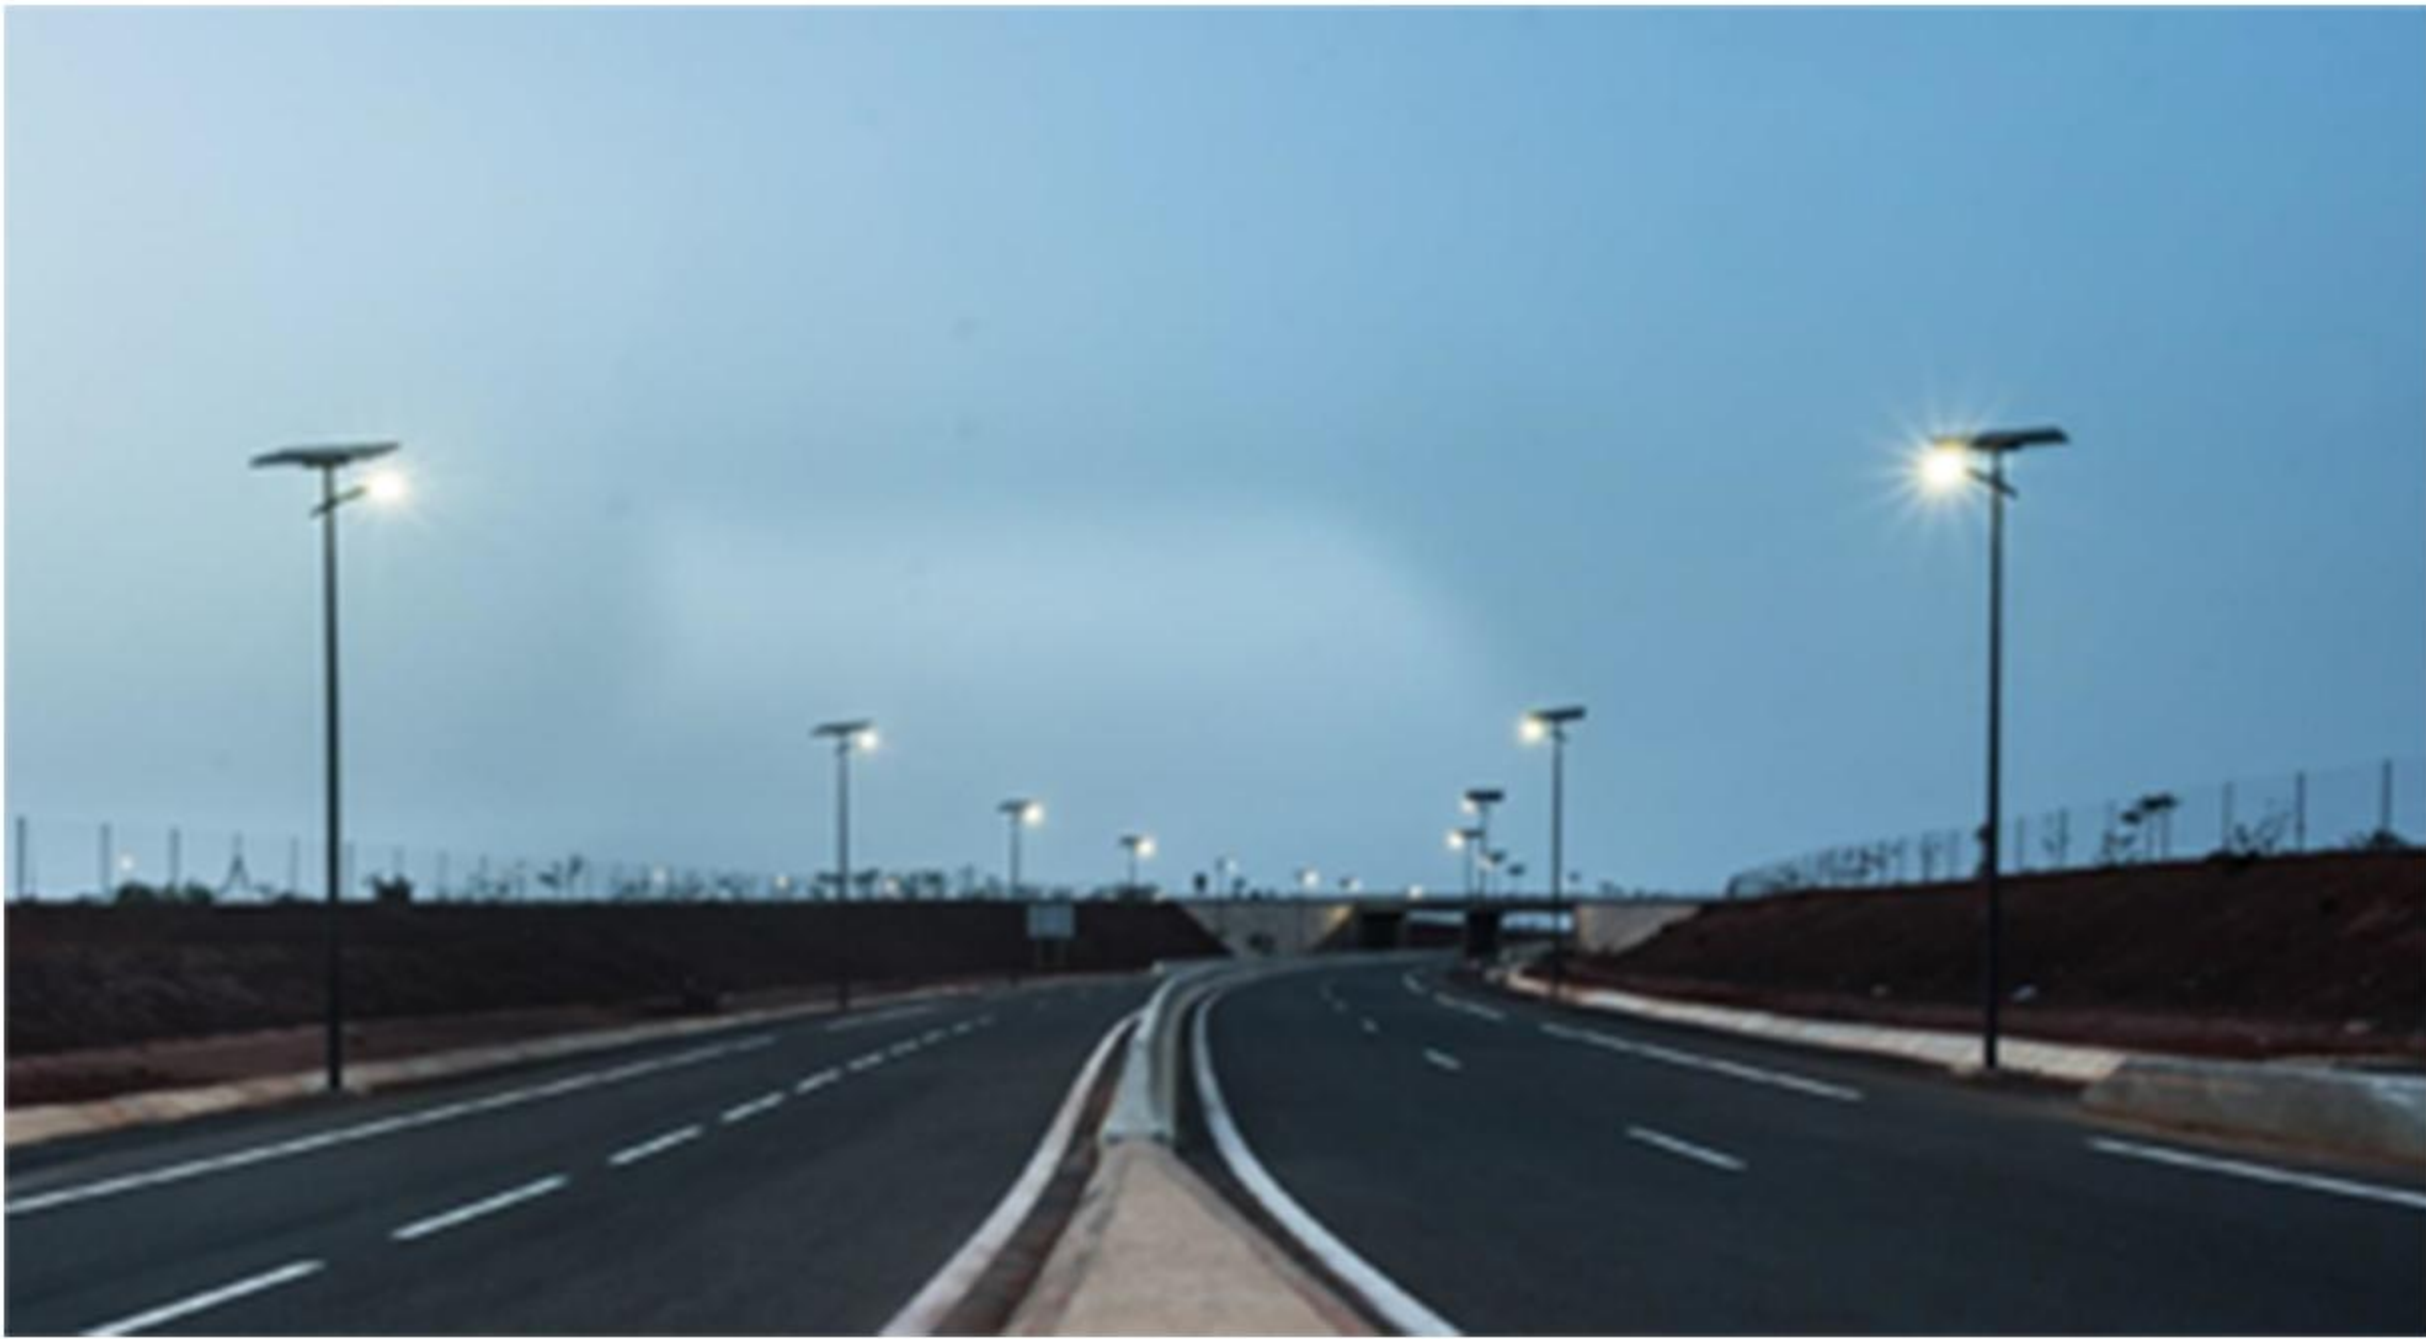

Engineering Cases





Guangdong Lifan Lighting Co., Ltd

ADD: Tianhong Optoelectronics Industrial Park, No. 133 Zhongxing Avenue North,
Guzhen Town, Zhongshan City, Guangdong Province

WhatsApp: +86 133 1826 8060

Email: sales@lifanlighting.com

www.lifanlighting.com